


Panel

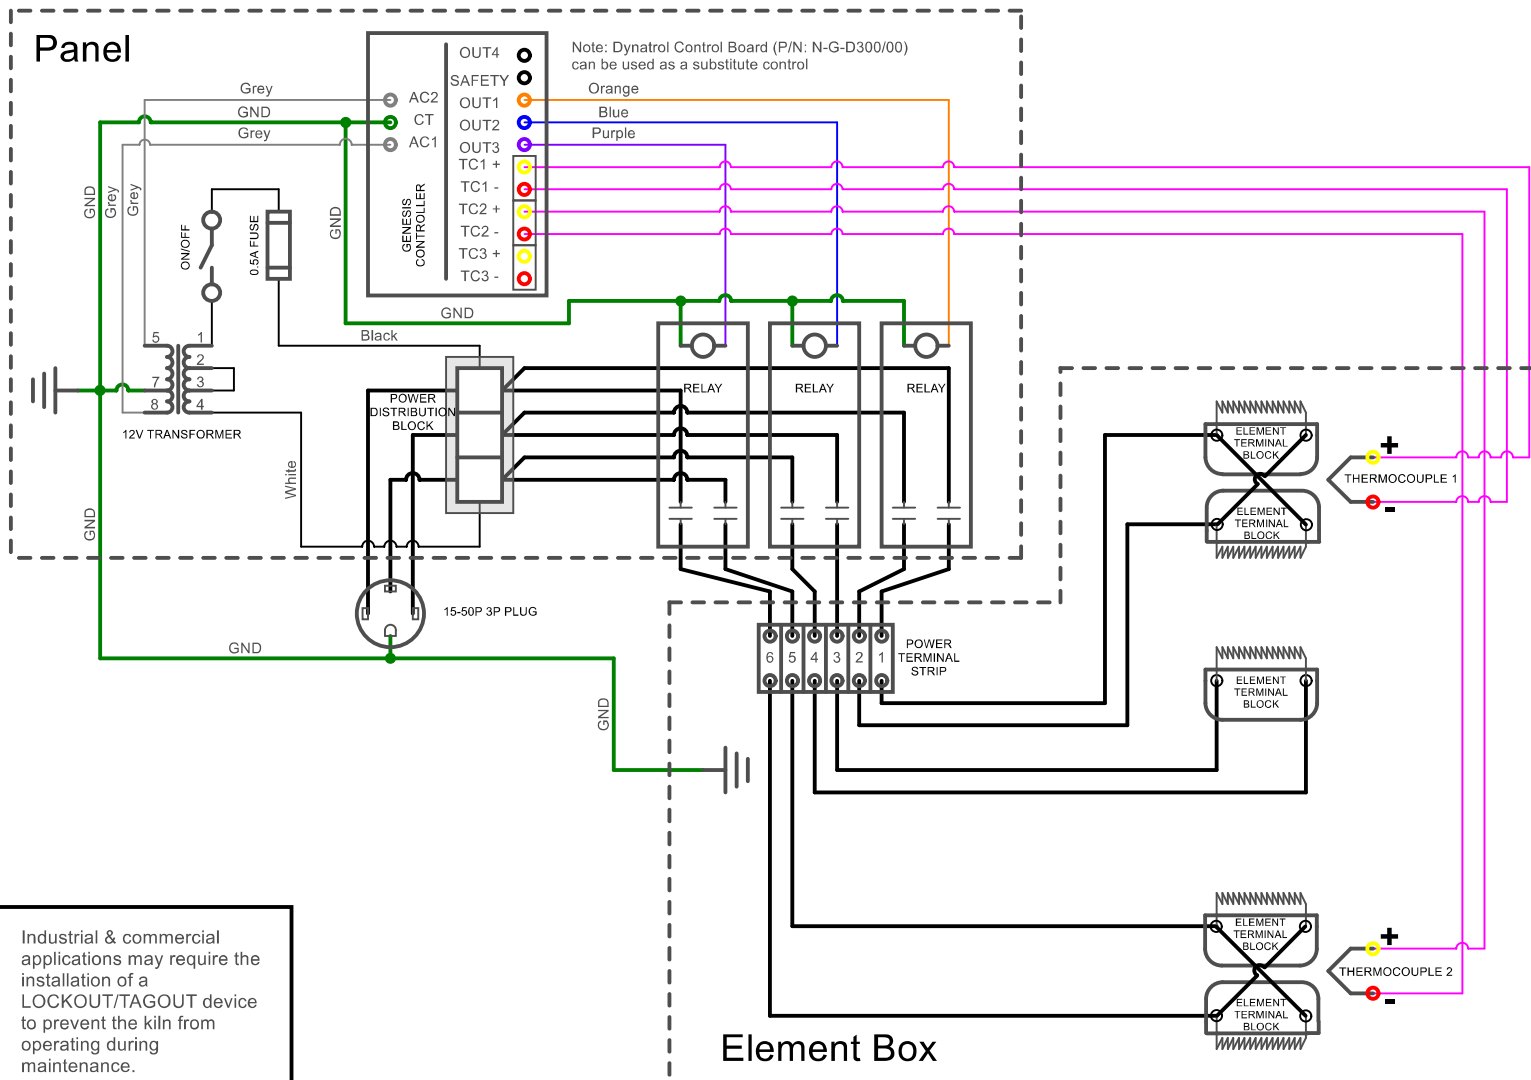

Element Box

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

Wiring Information	
Power	10AWG / 150°C / 600V
Control	16AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: e23M-208-3P			
Voltage	208 / 3 / 50-60		
Watts	11,520		
Full Load Amps	L1	L2	L3
	38.4	29.3	29.3
Power Supply	Fuse	Wire	
	50A	8AWG	

Standard Elements: E-E-23ML/22	
Quad Elements: E-E-23MQ/22	
Quantity: 5	Ohms: 18.1

Model: e23M-240-3P			
Voltage	240 / 3 / 50-60		
Watts	11,520		
Full Load Amps	L1	L2	L3
	33.3	25.4	25.4
Power Supply	Fuse	Wire	
	50A	8AWG	

Standard Elements: E-E-23ML/31	
Quad Elements: E-E-23MQ/31	
Quantity: 5	Ohms: 24.1

E23M Easy-Fire 3 Phase 208V, 240V



505 Sharptown Road
Swedesboro NJ 08085
service@hotkilns.com
(856)-294-0077

Drawn by: JS

C0018

Rev. Date Description