


Panel

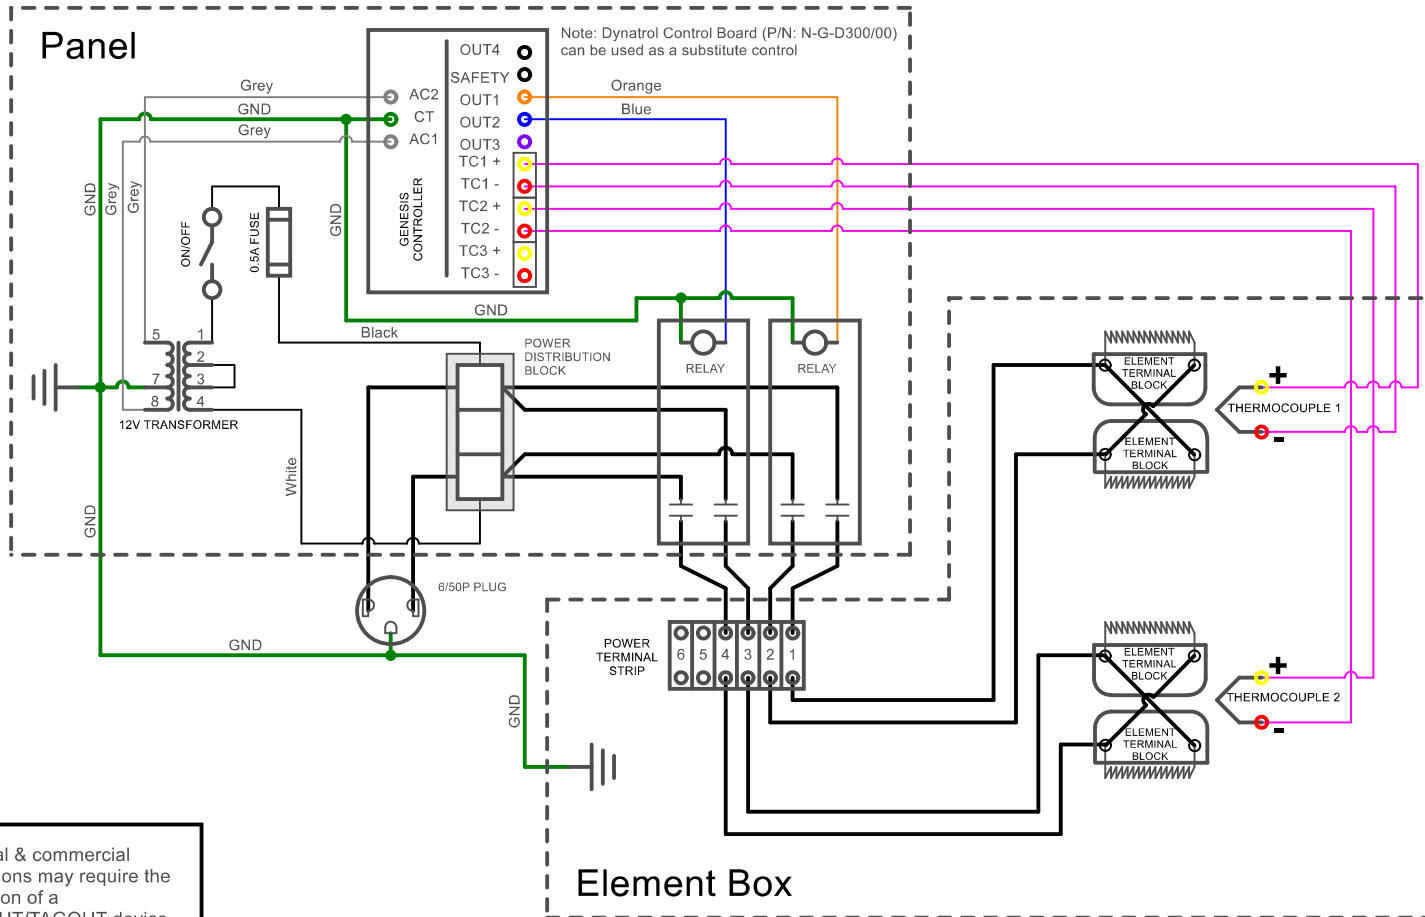

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

Wiring Information

Power	10AWG / 150°C / 600V
Control	16AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: e23S-208

Voltage	208 / 1 / 50-60		
Watts	8,320		
Full Load Amps	L1	L2	L3
	40.0	40.0	
Power Supply	Fuse	Wire	
	50A	8AWG	

Standard Elements: E-E-23SL/21
Quad Elements: E-E-23SU/21

Quantity: 4	Ohms: 20.0
-------------	------------

Model: e23S-240

Voltage	240 / 1 / 50-60		
Watts	9,460		
Full Load Amps	L1	L2	L3
	39.4	39.4	
Power Supply	Fuse	Wire	
	50A	8AWG	

Standard Elements: E-E-23SL/31
Quad Elements: E-E-23SU/31

Quantity: 4	Ohms: 23.4
-------------	------------

E23S Easy-Fire 1 Phase 208V, 240V



505 Sharptown Road
Swedesboro NJ 08085
service@hotkilns.com
(856)-294-0077

Drawn by: JS

Rev.	Date	Description	C0020
------	------	-------------	-------