


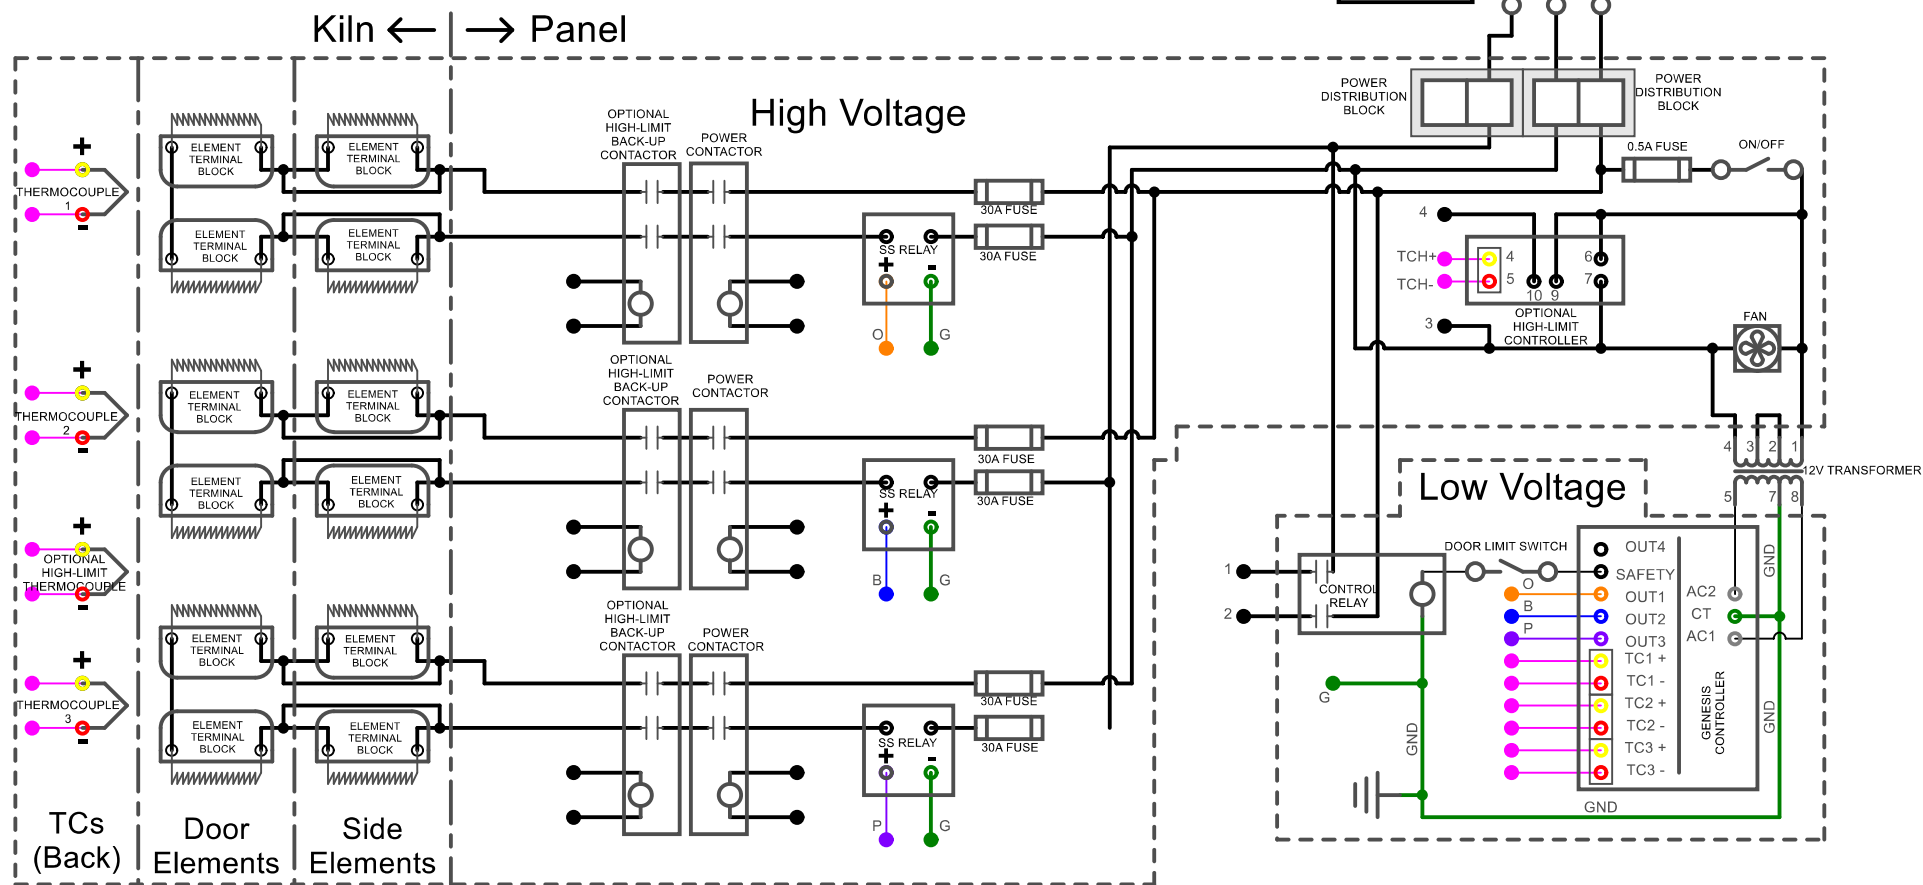

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

Model: EL2427-208-3P			
Voltage	208 / 3 / 50-60		
Watts	16,500		
Full Load Amps	L1	L2	L3
	45.8	45.8	45.8
Power Supply	Fuse	Wire	
	60A	6AWG	
Side Elements:			
Quantity: 6	Ohms:		
Door Elements:			
Quantity: 6	Ohms:		

Model: EL2427-240-3P						
Voltage		240 / 3 / 50-60				
Watts		16,500				
Full Load Amps		L1	L2	L3		
		39.7	39.7	39.7		
Power Supply		Fuse	Wire			
		50A	8AWG			
Side Elements:						
Quantity: 6		Ohms:				
Door Elements:						
Quantity: 6		Ohms:				

EL2427 3 Phase 208V, 240V



505 Sharptown Road
Swedesboro NJ 08085
service@hotkilns.com
(856)-294-0077

Drawn by: JS

C0051