

NOTES:

Control Wire:
16 AWG, 105°C
Power Wire:
10 AWG, 150°C


Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the Kiln from operating during maintenance.

This Kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the KW load load specification listed on the Kiln Nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.



LOOKING INSIDE CONTROL PANEL

LOOKING AT OUTSIDE OF ELEMENT COVER PANEL

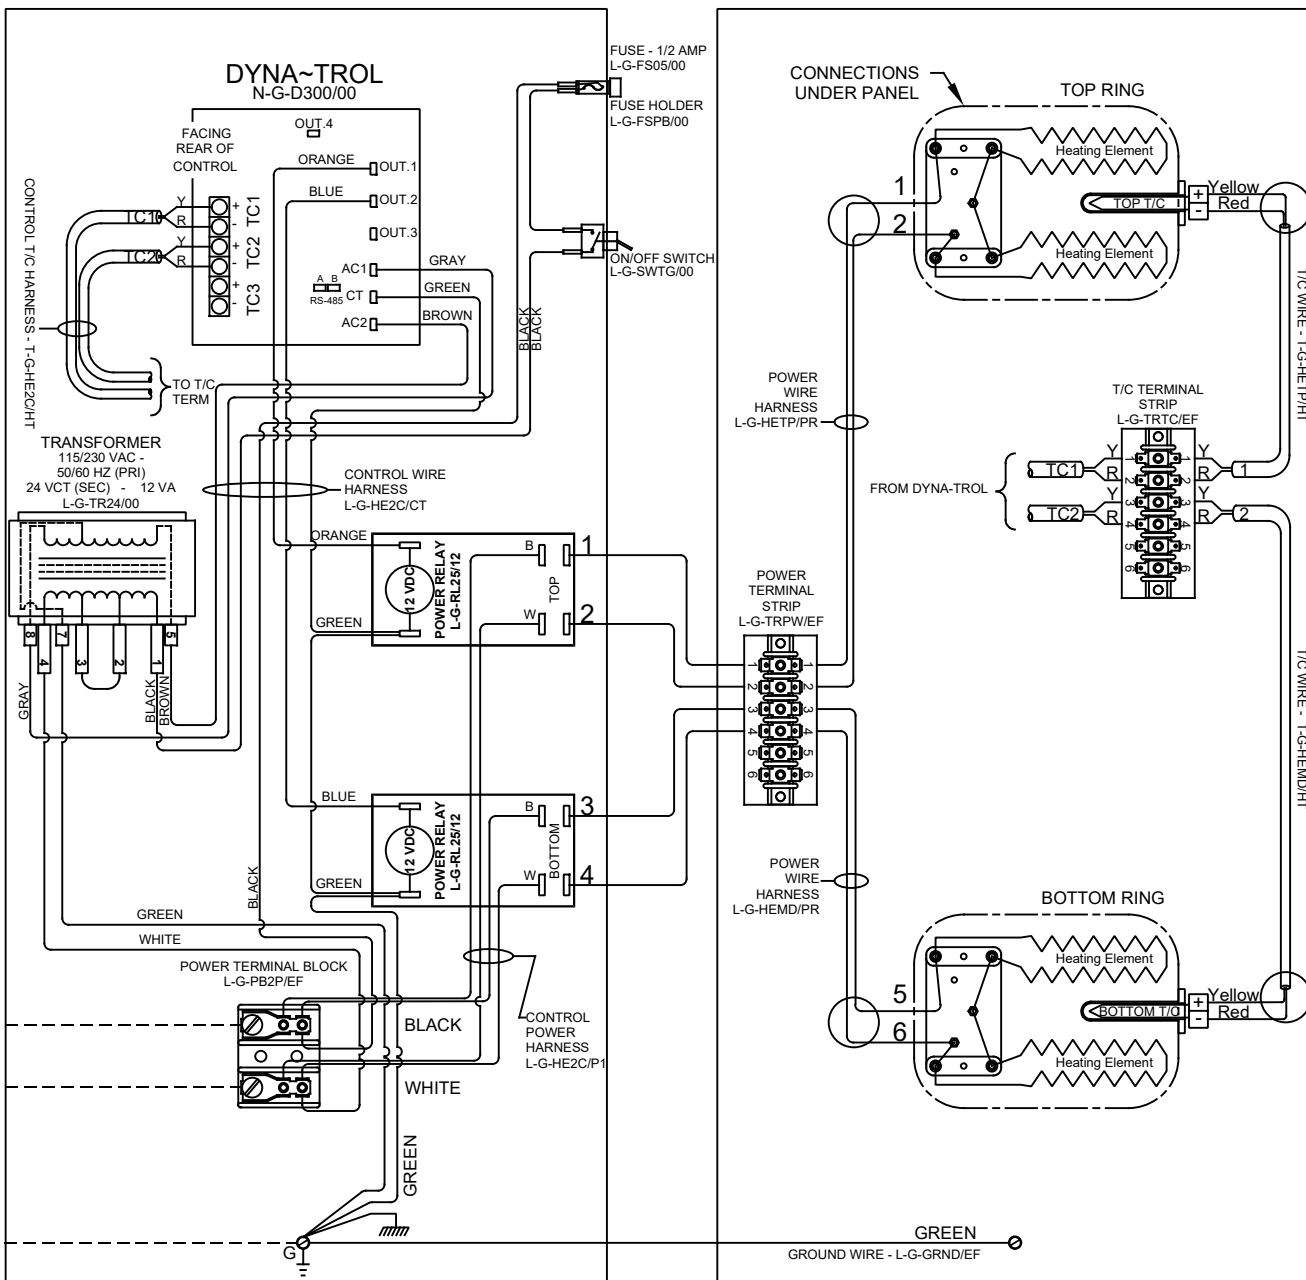

Model e23S-220			
VOLTAGE	220 / 1 / 50-60		
WATTS	8660		
FULL LOAD AMPS	L1	L2	L3
	39.4	39.4	∞
POWER SUPPLY	FUSE	WIRE	
	60A	6 AWG	
ELEMENTS E-E-23SL/41	QTY	OHMS	
	4	21.5	

SAFETY SWITCH BY CUSTOMER
Connect to
220 Volt, 2 Wire, Single Phase
50 or 60 Cycles.

REV. #	DATE	REVISION DESCRIPTION