
- 1. **WALL/KILN SPACING:** 12" [30.5cm] SPACING BETWEEN SIDES OF KILN AND WALLS OR OTHER OBJECTS. 18" [45.7cm] IS RECOMMENDED. LEAVE AT LEAST 18" [45.7cm] BETWEEN TWO KILNS.
- 2. **AMBIENT VENTILATION:** SEE CHART TO RIGHT FOR RATINGS. TO CALCULATE REQUIREMENTS, SEE hotkilns.com/calculate-kiln-room-ventilation.
- 3. **KILN VENTILATION:** L&L VENT-SURE KILN VENT RECOMMENDED FOR SAFETY AND LONGER ELEMENT LIFE. OPTIONAL CONTROL ALLOWS VENT TO BE TURNED ON AND OFF WITH CONTROL.
- 4. **OTHER INFO:** REFER TO INSTALLATION INSTRUCTIONS AND CAUTIONS INSTRUCTIONS FOR OTHER REQUIREMENTS AND SAFETY INFORMATION. REFER TO WIRING DIAGRAM FOR ELECTRICAL HOOKUP INFORMATION.
- 5. **MAX LOAD WEIGHT:** SEE <u>hotkilns.com/load-weight</u>.
- WEIGHT OF KILN: 165 LBS, 75 KG


BTUS/ KILOJOULES PER HOUR NEEDED TO BE VENTED WITH AMBIENT ROOM VENTILATION (THIS IS IN ADDITION TO KILN VENTING):


AT TEMP F	BTUS	AT TEMP C	KILOJOULES				
1800F	7778	980C	8206				
2000F	9094	1095C	9595				
2232F	10739	1222C	11330				
2350F	11624	1285C	12264				

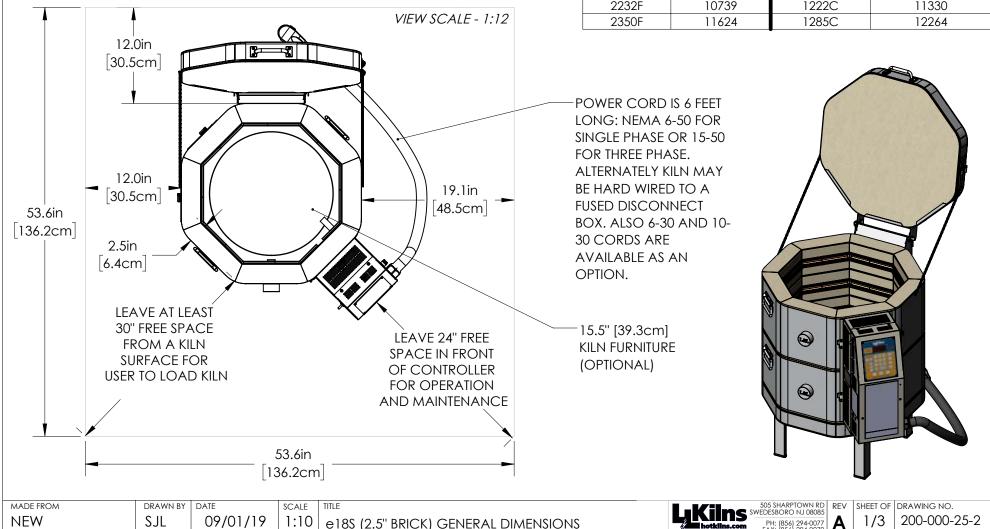

3

5

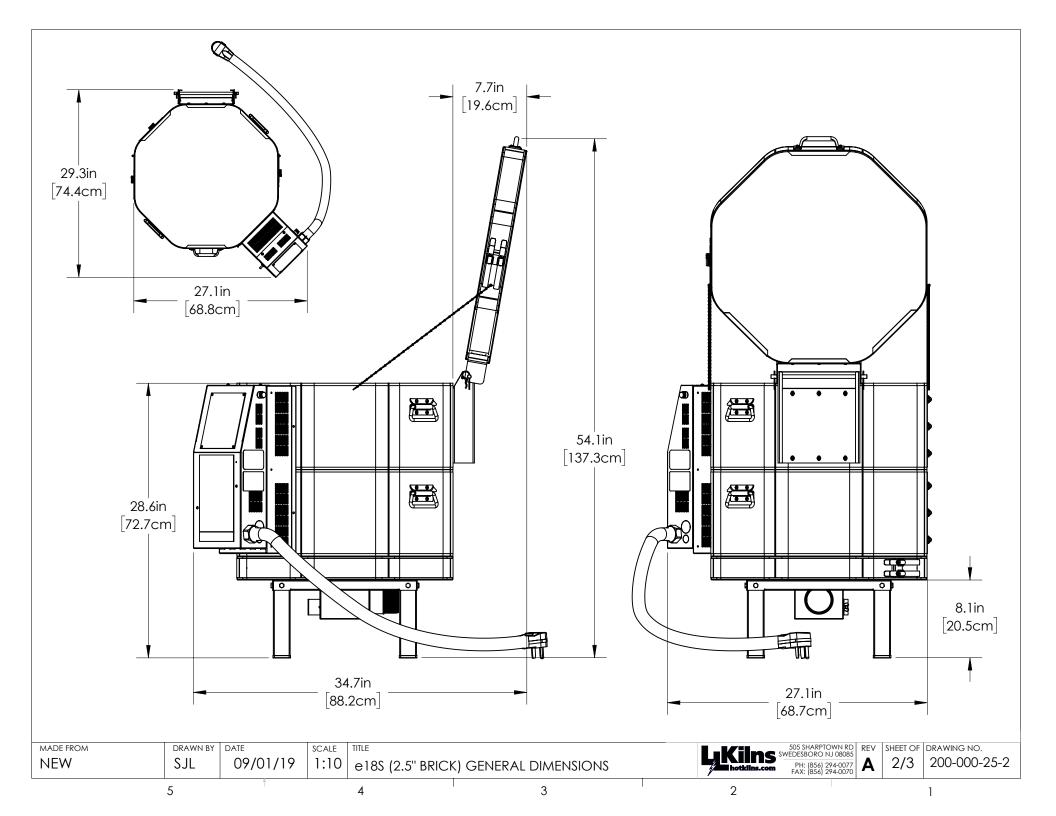

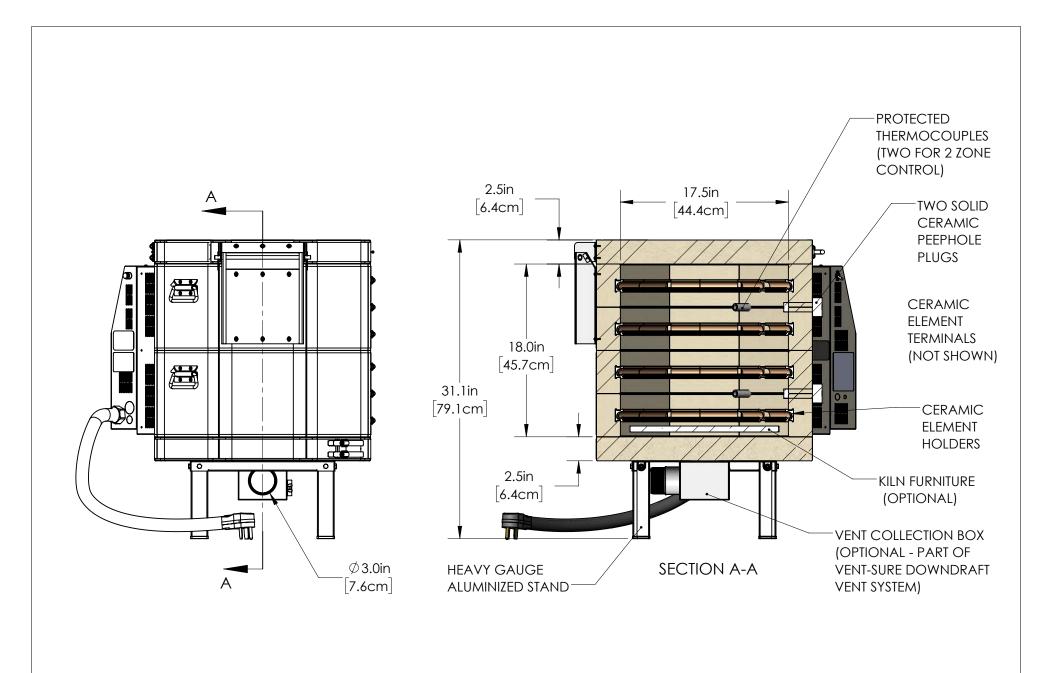

OPTIONAL FURNITURE KIT: (1) 15.5" [39.3cm] FULL ROUND SHELF, (4) HALF ROUND SHELVES, FOUR EACH 1/2", 1", 2", 4", 6" SQUARE POSTS

MADE FROM NEW	SJL	09/01/19	SCALE 1:10	e18S (2.5" BRICK) GENERAL DIMENSIONS		Sos SHARPTOWN RD SWEDESBORO NJ 08085 REV H: (856) 294-0070 A		SHEET OF 3/3	DRAWING NO. 200-000-25-2		
	5	1		4	3	2				1	