


Panel

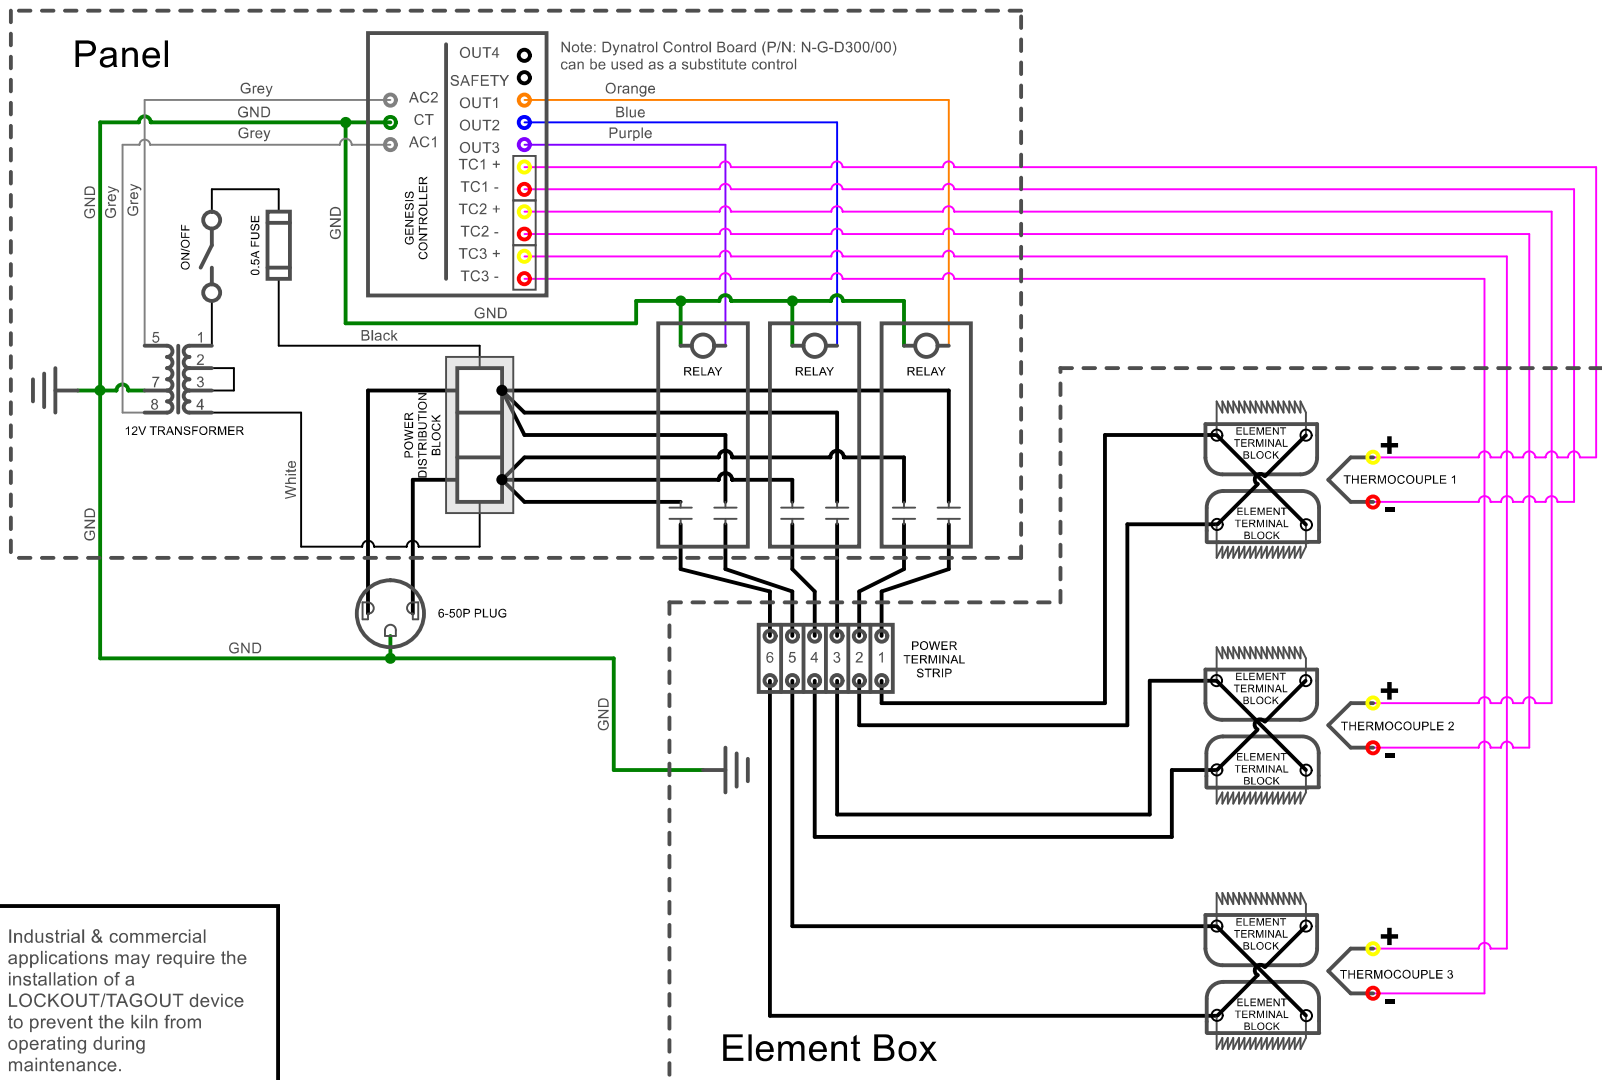

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

Wiring Information

Power	10AWG / 150°C / 600V
Control	16-22AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: e28T-208

Voltage	208 / 1 / 50-60
Watts	9,985
Full Load Amps	L1 48.0 L2 48.0 L3 48.0
Power Supply	Fuse 60A Wire 6AWG

Standard Elements:	E-E-28TL/21
Quad Elements:	E-E-28TU/21
Quantity:	6
Ohms:	25.0

Model: e28T-240

Voltage	240 / 1 / 50-60
Watts	11,520
Full Load Amps	L1 48.0 L2 48.0 L3 48.0
Power Supply	Fuse 60A Wire 6AWG

Standard Elements:	E-E-28TL/31
Quad Elements:	E-E-28TU/31
Quantity:	6
Ohms:	28.9

E28T Easy-Fire 1 Phase 208V, 240V



505 Sharptown Road
Swedesboro NJ 08085
service@hotkilns.com
(856)-294-0077

Drawn by: JS

Rev. Date Description C0036