


Panel

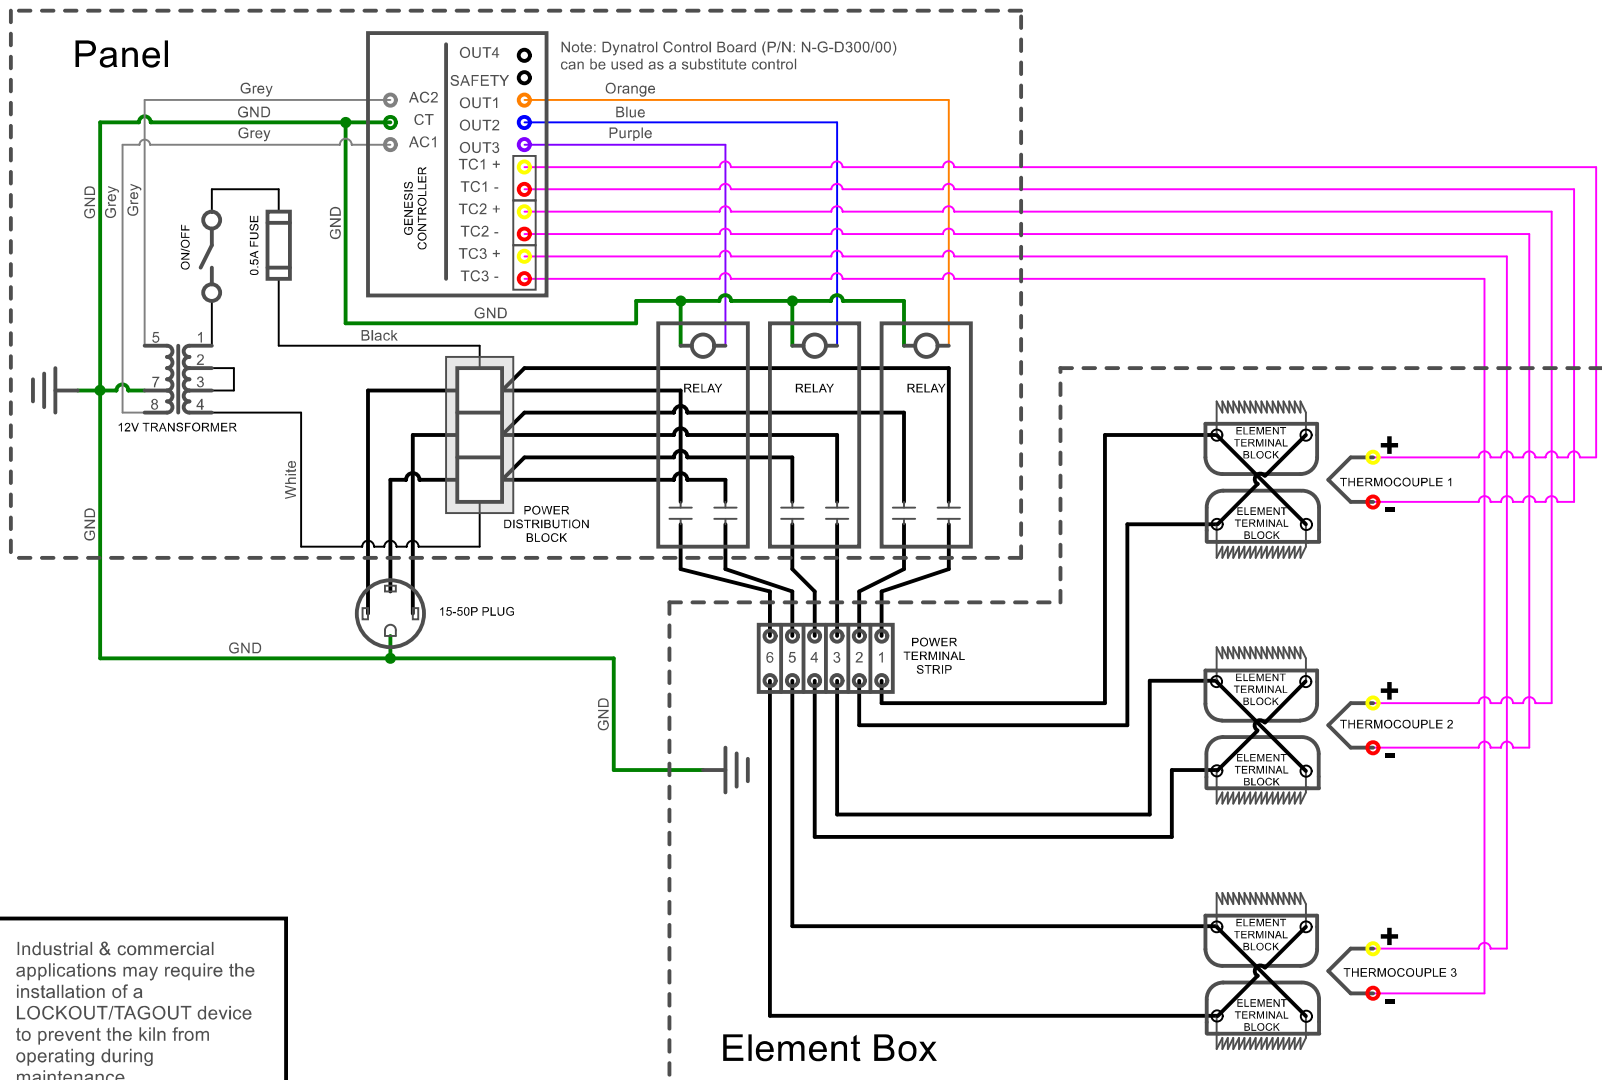

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

Wiring Information	
Power	10AWG / 150°C / 600V
Control	16-22AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: e28T-208-3P	
Voltage	208 / 3 / 50-60
Watts	14,340
Full Load Amps	L1 L2 L3
	39.8 39.8 39.8
Power Supply	Fuse Wire
	50A 8AWG
Standard Elements: E-E-28TL/22	
Quad Elements: E-E-28TU/22	
Quantity: 6	Ohms: 17.4

Model: e28T-240-3P	
Voltage	240 / 3 / 50-60
Watts	16,620
Full Load Amps	L1 L2 L3
	40.0 40.0 40.0
Power Supply	Fuse Wire
	50A 8AWG
Standard Elements: E-E-28TL/32	
Quad Elements: E-E-28TU/32	
Quantity: 6	Ohms: 20.0

E28T Easy-Fire 3 Phase 208V, 240V



505 Sharptown Road
Swedesboro NJ 08085
service@hotkilns.com
(856)-294-0077

Drawn by: JS

C0038

Rev. Date Description