
- 1. WALL/KILN SPACING: 12" [30.5cm] SPACING BETWEEN SIDES OF KILN AND WALLS OR OTHER OBJECTS. 18" [45.7cm] IS RECOMMENDED. LEAVE AT LEAST 18" [45.7cm] BETWEEN TWO KILNS.
- 2. AMBIENT VENTILATION: SEE CHART TO RIGHT FOR RATINGS. TO CALCULATE REQUIREMENTS, SEE hotkilns.com/calculate-kiln-room-ventilation.
- 3. KILN VENTILATION: FUEGOS CAN BE VENTED MANUALLY WITH THE VENT HOLE AT THE TOP BUT CAN ALSO BE FITTED WITH A VENT-SURE VENT SYSTEM
- **OTHER INFO: REFER TO INSTALLATION INSTRUCTIONS AND** CAUTIONS INSTRUCTIONS FOR OTHER REQUIREMENTS AND SAFETY INFORMATION. REFER TO WIRING DIAGRAM FOR ELECTRICAL HOOKUP INFORMATION.
- MAX LOAD WEIGHT: SEE hotkilns.com/load-weight.
- WEIGHT OF KILN: 150 LBS, 69 KG


BTUS/ KILOJOULES PER HOUR NEEDED TO BE VENTED WITH AMBIENT ROOM VENTILATION (THIS IS IN ADDITION TO KILN VENTING):


AT TEMP F	BTUS	AT TEMP C	KILOJOULES
1800F	5280	980C	5570
2000F	6172	1095C	6512
2232F	7288	1222C	7689
2350F	7887	1285C	8322

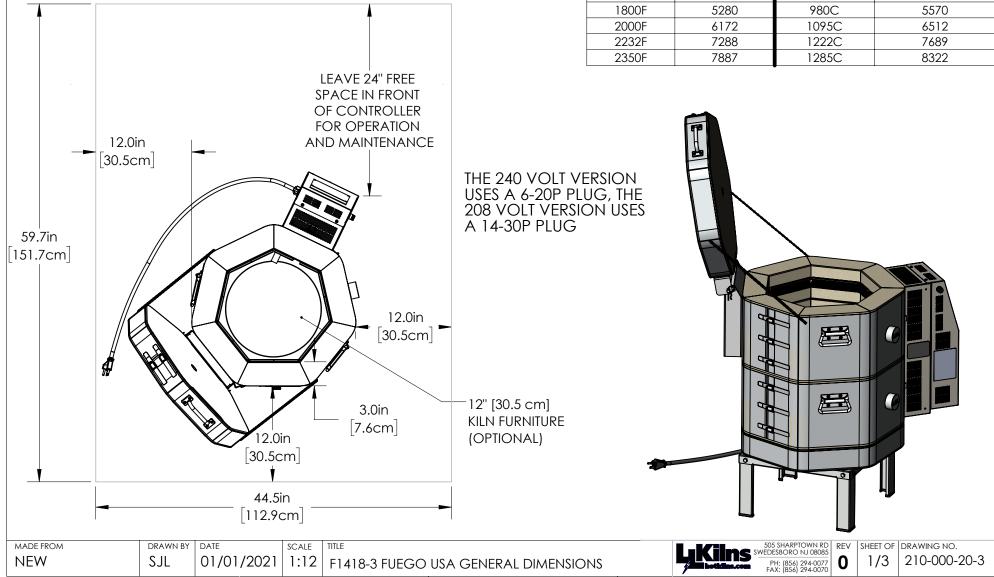

3

5

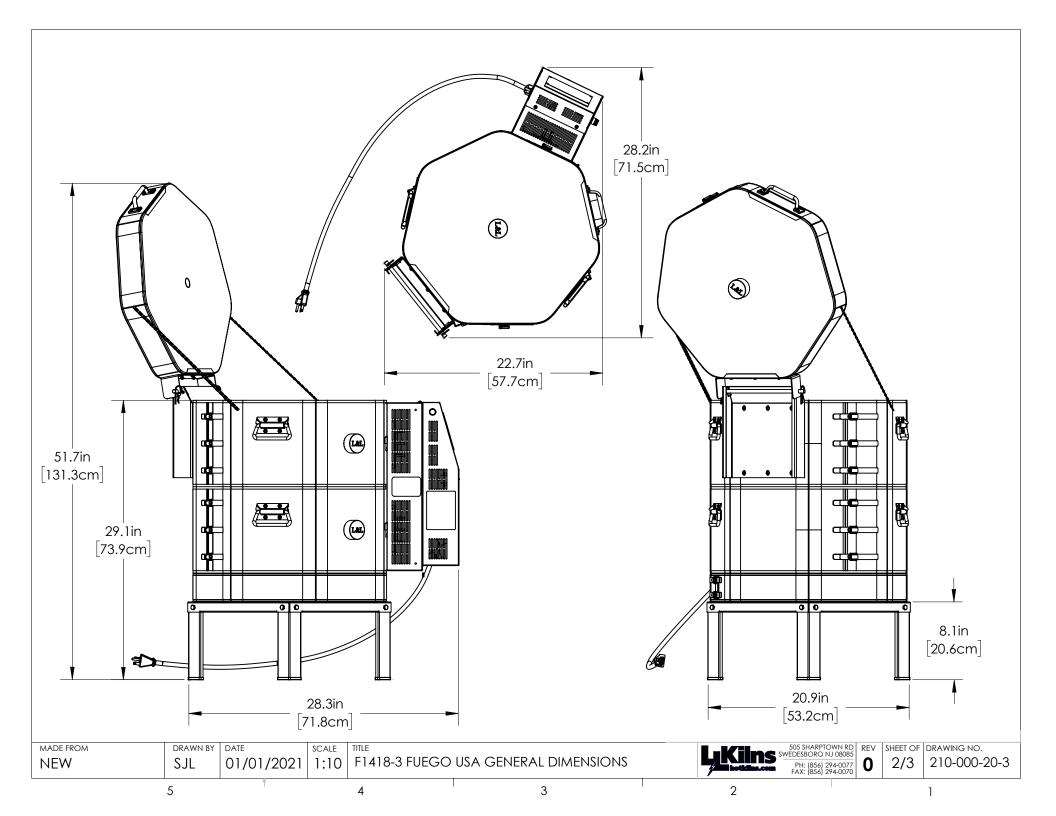

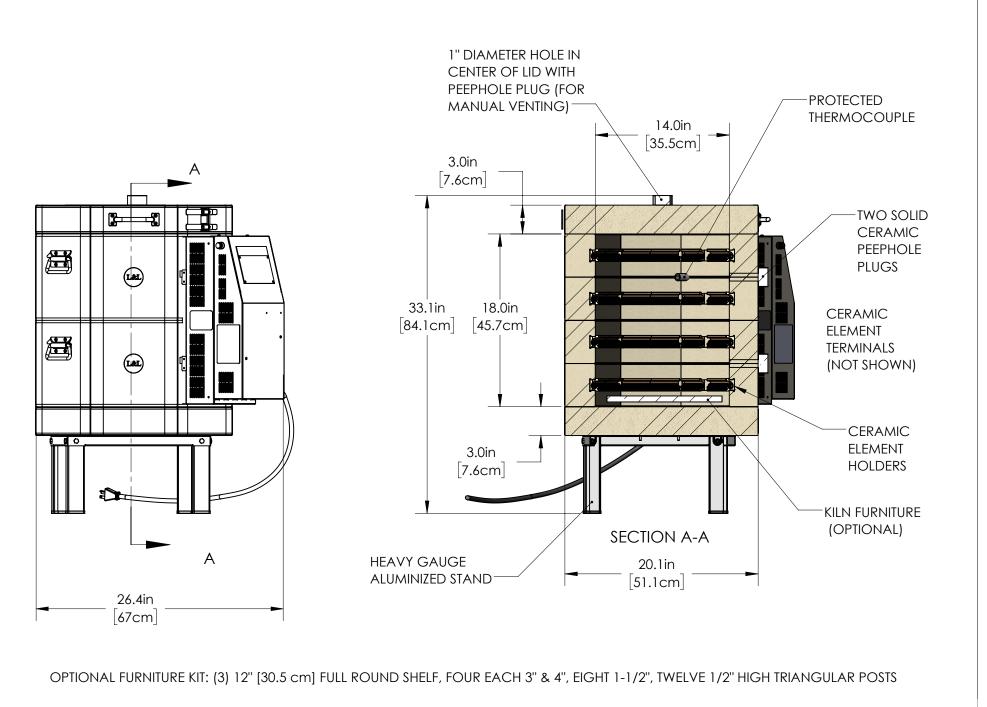

| MADE FROM | DRAWN BY | DATE | SCALE | TITLE | SJL | D1/01/2021 | 1:10 | F1418-3 FUEGO USA GENERAL DIMENSIONS | LIKE | SWEDESBORON UJ 00857 | FAX: (856) 294-0070 | 0 | 3/3 | 210-000-20-3

5 4 2