
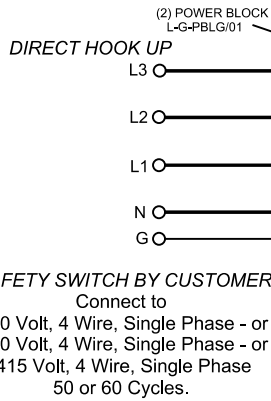


NOTES:

Control Wire:
16 AWG, 105°C
Power Wire:
10 AWG, 150°C

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the Kiln from operating during maintenance.

This Kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the KW load specification listed on the Kiln Nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

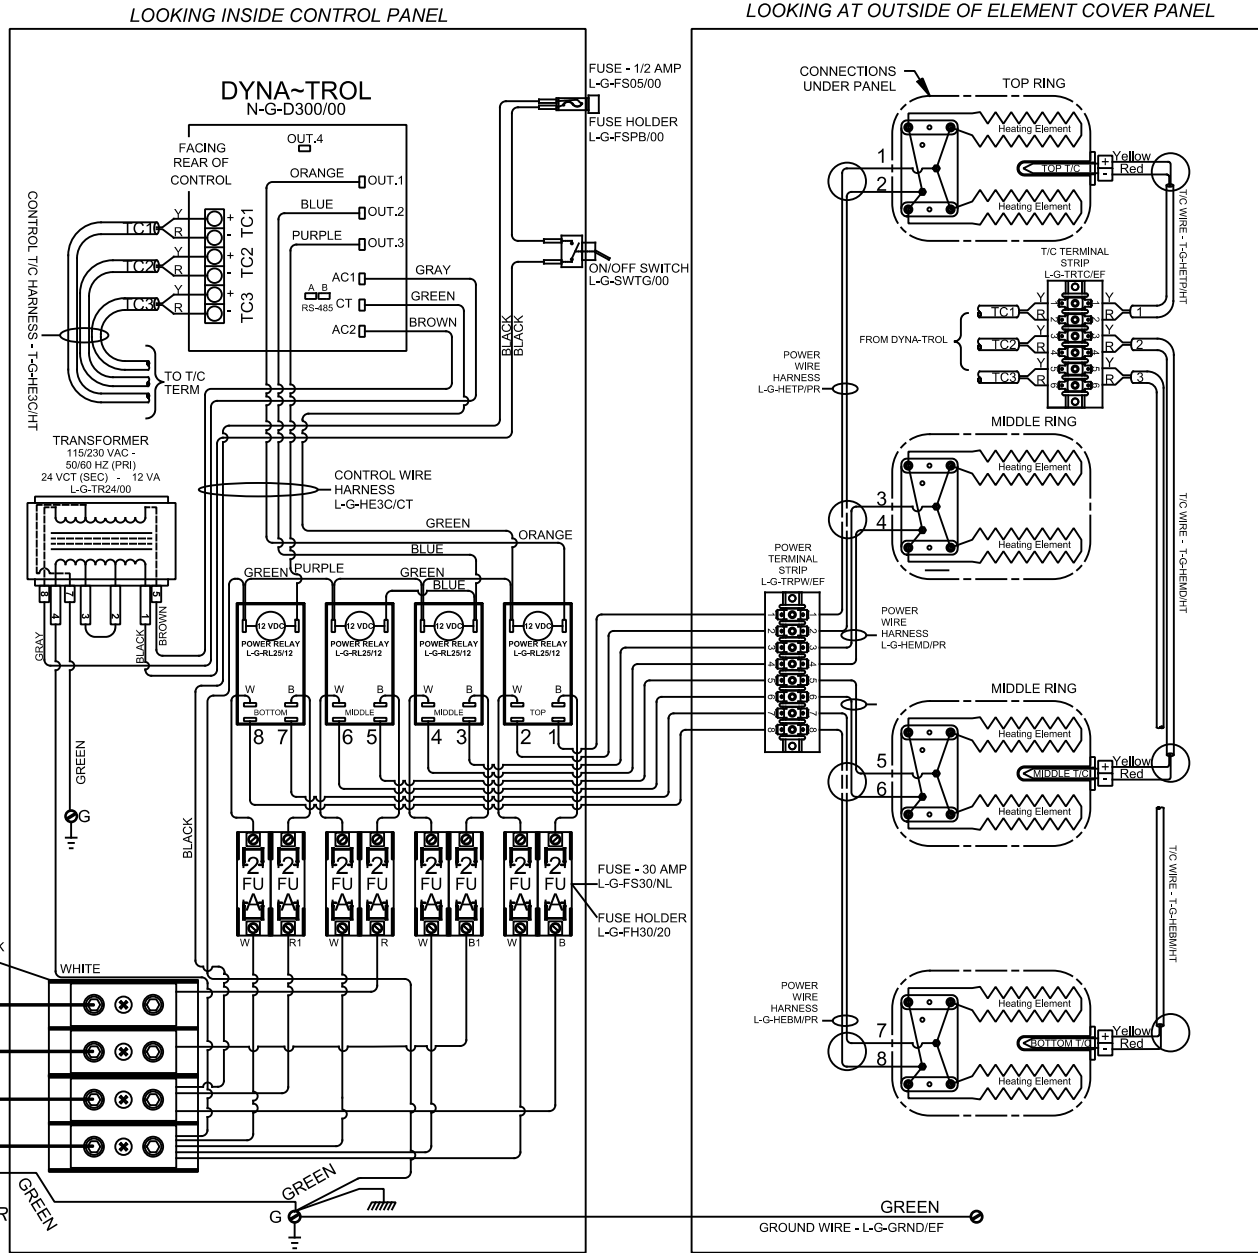

Model eQ2836-3PY	
VOLTAGE	380 / 3-Y / 50-60
WATTS	19,000
FULL LOAD AMPS	L1 L2 L3 43.2 21.6 21.6
POWER SUPPLY	FUSE WIRE 60A 6 AWG
ELEMENTS (E-Q-2836/40)	QTY OHMS 8 19.6

Model eQ2836-3PY	
VOLTAGE	400 / 3-Y / 50-60
WATTS	20,768
FULL LOAD AMPS	L1 L2 L3 45.2 22.6 22.6
POWER SUPPLY	FUSE WIRE 60A 6 AWG
ELEMENTS (E-Q-2836/40)	QTY OHMS 8 19.6

Model eQ2836-3PY	
VOLTAGE	415 / 3-Y / 50-60
WATTS	19,000
FULL LOAD AMPS	L1 L2 L3 39.6 19.8 19.8
POWER SUPPLY	FUSE WIRE 50A 6 AWG
ELEMENTS (E-Q-2836/30)	QTY OHMS 8 23.3