


LOOKING INSIDE CONTROL PANEL

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the Kiln from operating during maintenance.

LOOKING AT OUTSIDE OF ELEMENT COVER PANEL

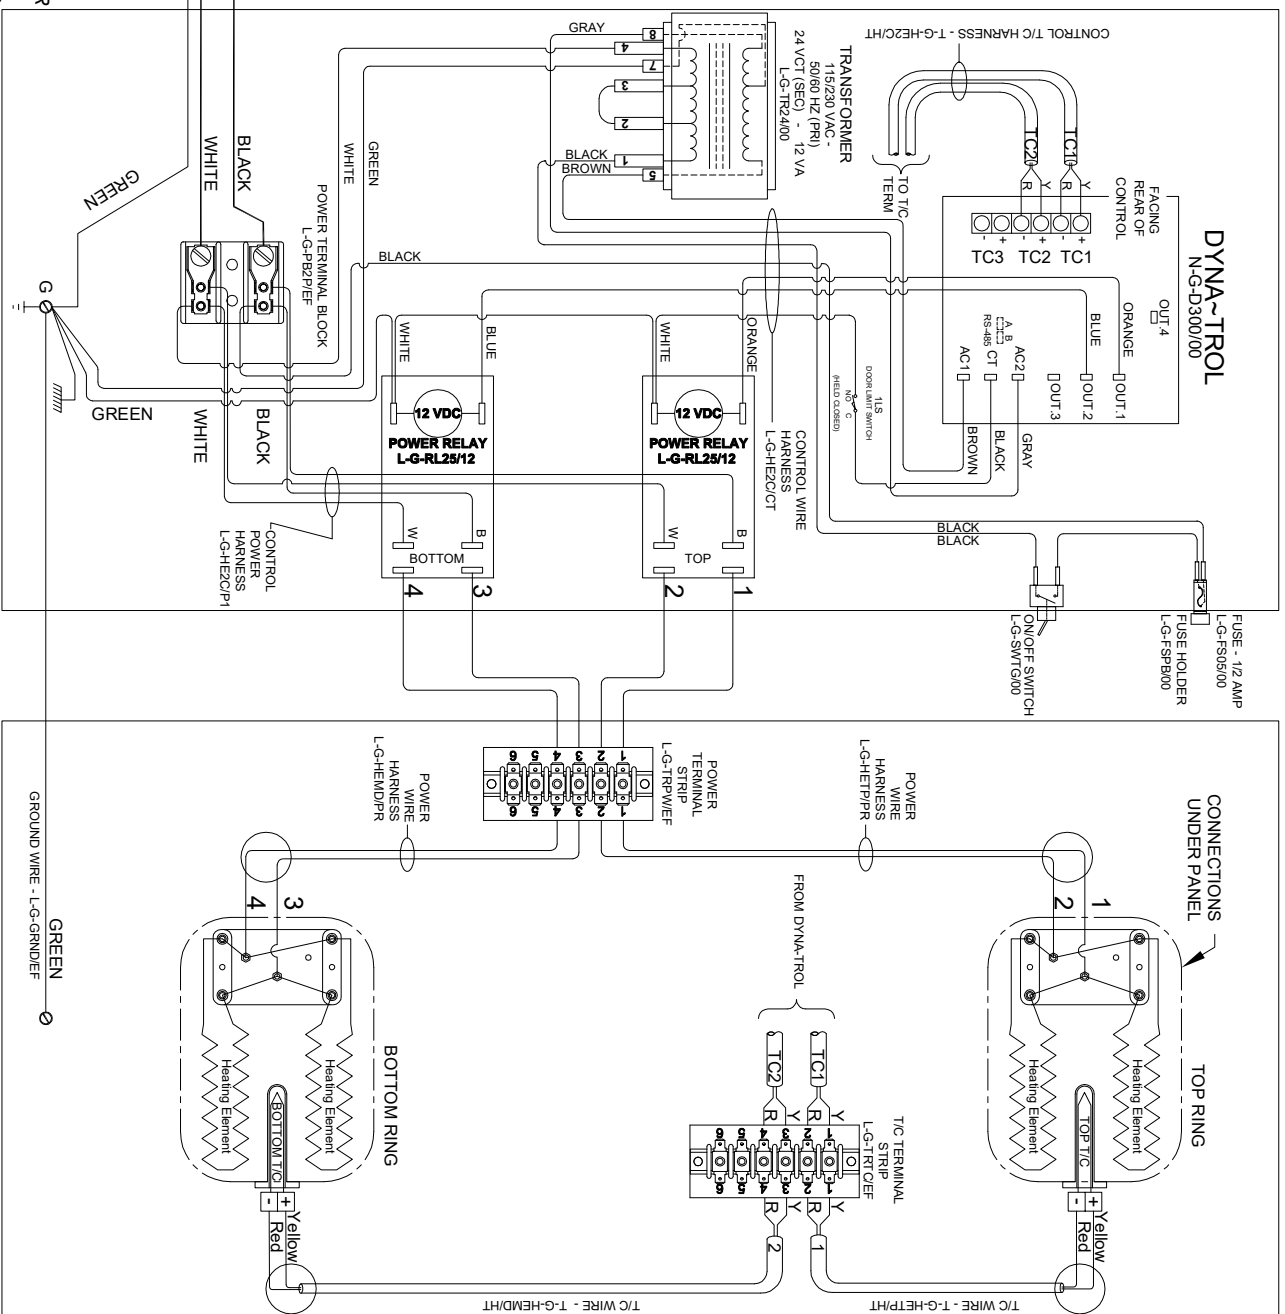

Model			
eFL1616 - 208			
VOLTAGE	208 / 1 / 50-60		
WATTS	9,000		
FULL LOAD AMPS	L1 43.3	L2 43.3	L3 43.3
POWER SUPPLY	FUSE 60A	WIRE 6 AWG	
ELEMENTS	QTY 4	OHMS 18.5	

Model			
eFL1616 - 220			
VOLTAGE	220 V / 50-60		
WATTS	9,000		
FULL LOAD AMPS	L1 40.4	L2 40.4	L3 40.4
POWER SUPPLY	FUSE 55A	WIRE 6 AWG	
ELEMENTS	QTY 4	OHMS 20.7	

Model			
eFL1616 - 240			
VOLTAGE	240 / 1 / 50-60		
WATTS	9,000		
FULL LOAD AMPS	L1 37.5	L2 37.5	L3 37.5
POWER SUPPLY	FUSE 50A	WIRE 6 AWG	
ELEMENTS	QTY 4	OHMS 24.6	

DRAWING NO. **K380-151** SHEET OF **1/1** REV **0**

Ltkins  ltkins.com

505 SHARPTOWN RD.
SWEDESBORO, NJ 08065

PHONE: (866) 294-0077
FAX: (908) 294-0078

TITLE
MODEL eFL 1616
1 PHASE WIRING DIAGRAM

SCALE
1 = 8

DATE 10/12/17

DRAWN BY
C.H.

FILE NAME

MADE FROM
K284-151

0	10/12/17	FIRST ISSUE