

NOTES:

Control Wire:
16 AWG, 105°C
Power Wire:
10 AWG, 150°C


Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the Kiln from operating during maintenance.

This Kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the KW load load specification listed on the Kiln Nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.


PLUG
208/240 VAC 3Ø
NEMA 15-50P
L-G-PC50/3P

SAFETY SWITCH BY CUSTOMER
Connect to
240 Volt, 3 Wire, Three Phase - or
220 Volt, 3 Wire, Three Phase - or
208 Volt, 3 Wire, Three Phase
DELTA
50 or 60 Cycles.

LOOKING INSIDE CONTROL PANEL

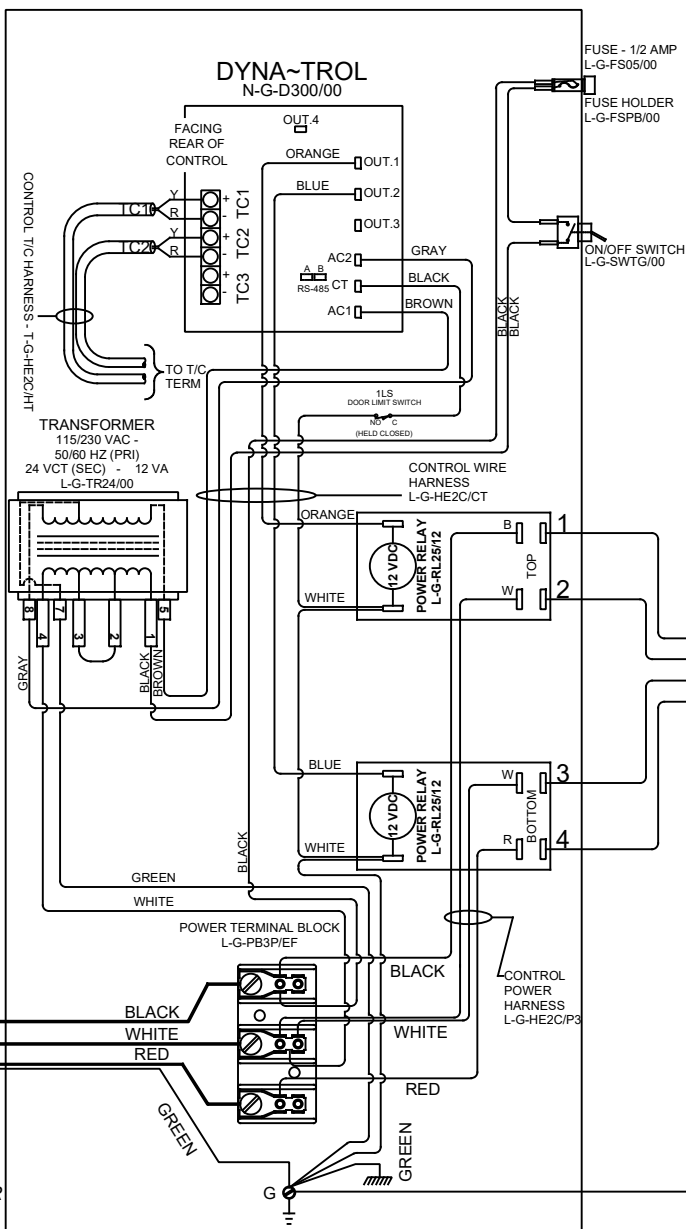

LOOKING AT OUTSIDE OF ELEMENT COVER PANEL

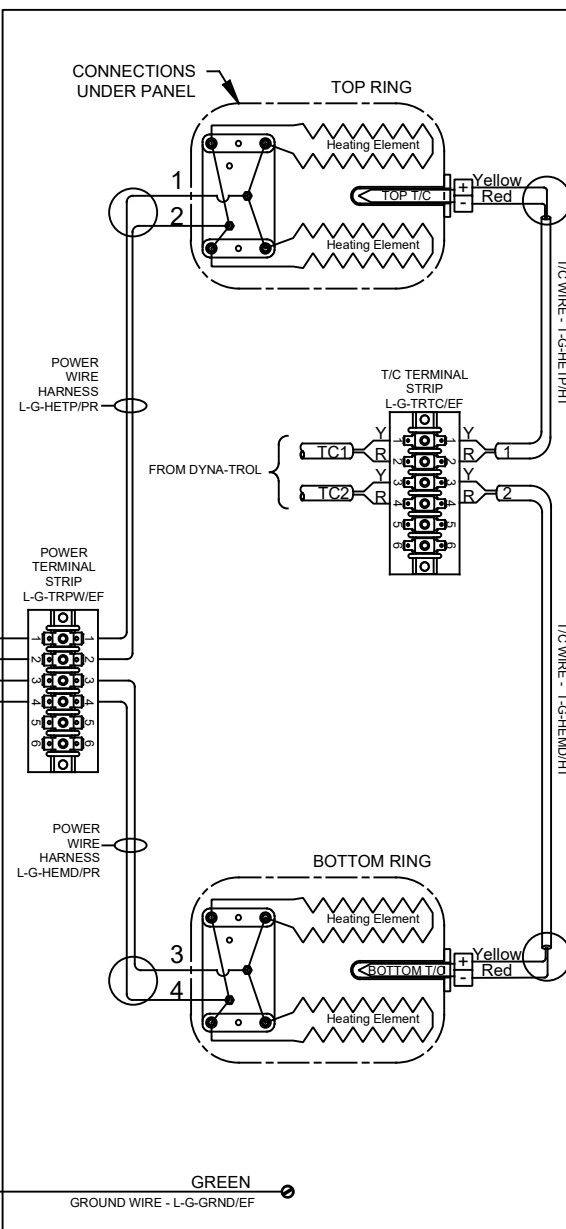

Model eFL1616 - 208

VOLTAGE	208 / 3 / 50-60		
WATTS	9,000		
FULL LOAD AMPS	L1	L2	L3
	21.6	37.5	21.6
POWER SUPPLY	FUSE	WIRE	
	50A	6 AWG	
ELEMENTS	QTY	OHMS	
	4	18.5	

Model eFL1616 - 220

VOLTAGE	220 / 3 / 50-60		
WATTS	9,000		
FULL LOAD AMPS	L1	L2	L3
	20.5	35.4	20.5
POWER SUPPLY	FUSE	WIRE	
	50A	6 AWG	
ELEMENTS	QTY	OHMS	
	4	20.7	

Model eFL1616 - 240

VOLTAGE	240 / 3 / 50-60		
WATTS	9,000		
FULL LOAD AMPS	L1	L2	L3
	18.8	32.5	18.8
POWER SUPPLY	FUSE	WIRE	
	50A	6 AWG	
ELEMENTS	QTY	OHMS	
	4	24.6	