

T2336


Temperature Rating: Cone 10

Volume: 19.2 Cubic Feet

Brick Thickness: 3" Brick

Inside: 34.75" D x 36" H

34.75" W
x 26.5" D x
36" H

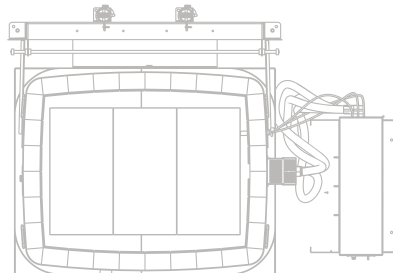


Large volume square and rectangular kilns with adjustable height. DaVinci kilns are great for production and tiles. Includes arched sides for strength and counterbalanced lid.

- **Genesis Touch Screen Control** with Dynamic Zone Control
- **Cone 10 • 2350°F • 1290°C**
- **Counterbalanced Lid** with springs inside of tubes
- **Safety Latches for Lid**
- **Welded angle-iron powder-coated stand and hinge**
- **3" brick**
- **Type K Thermocouples (3)**
 - with protection tubes
- **Strong arched sides** with extra space added to interior dimensions for good air circulation
- **Three elements per 9" section**
- **Ceramic Element Terminals**
- **Hard Ceramic Element Channels**
- **Plug in kiln sections** (except 480 volt models)
- **Floor mounted control panel**
- **Solid State Power Controls**
- **c-ETL-us listed to UL499 Standards**
- **See hotkilns.com/t2336 for all features and options**

GENERAL DIMENSIONS



Scan OR Visit:
hotkilns.com/T2336-GD



TRUST YOUR KILN
hotkilns.com

Manufactured in Swedesboro, NJ
800-750-8350 • sales@hotkilns.com

Bulletin No: BL-T2336 REV: A

Page 1



Electrical Specifications for T2336

DaVinci Top-Loading Kilns

USA

Standard Models							Powered Bottom Models				
Model Number	Part Number	Volt/Phase	Watts	Amps	Wire Size	Fuse Size	Part Number	Watts	Amps	Wire Size	Fuse Size
T2336-D-240	K-T-2336/31	240/1P	26,013	108.4	3/0	150	K-T-233P/31	30,347	126.4	4/0	175
T2336-D-240-3P	K-T-2336/32	240/1P	26,013	71.7	2 ga	90	K-T-233P/32	30,347	86.2	1 ga	110
T2336-D-208	K-T-2336/21	208/1P	26,013	125.1	4/0	175	K-T-233P/21	30,347	145.9	250 mcm	200
T2336-D-208-3P	K-T-2336/22	208/3P	26,013	82.7	1 ga	110	K-T-233P/22	30,347	99.4	1/0	125
T2336-D-480-3P	K-T-2336/62	480/3P	26,013	31.3	8 ga	40	K-T-233P/62	30,347	39.1	6 ga	50
TB2336-D-240	K-T-233B/31	240/1P	30,680	127.8	4/0	175	K-T-233W/31	35,793	149.1	250 mcm	200
TB2336-D-240-3P	K-T-233B/32	240/1P	30,680	84.6	1 ga	110	K-T-233W/32	35,793	101.6	3/0	150
TB2336-D-208	K-T-233B/21	208/1P	30,680	147.5	250 mcm	200	K-T-233W/21	35,793	172.1	300 mcm	225
TB2336-D-208-3P	K-T-233B/22	208/3P	30,680	97.6	1/0	125	K-T-233W/22	35,793	117.3	3/0	150
TB2336-D-480-3P	K-T-233B/62	480/3P	30,680	36.9	6 ga	50	K-T-233W/62	35,793	46.2	6 ga	60

WORLD


T2336-D-220	K-T-2336/41	220/1P	26,013	118.2	3/0	150	K-T-233P/41	30,347	137.9	4/0	175
T2336-D-380-3PY	K-T-2336/52	380/3PY	26,013	59.1	3 ga	80	K-T-233P/52	30,347	59.1	3 ga	80
T2336-D-400-3PY	K-T-2336/82	400/3PY	26,013	56.6	3 ga	80	K-T-233P/52	30,347	56.6	3 ga	80
T2336-D-415-3PY	K-T-2336/72	415/3PY	26,013	54.2	4 ga	70	K-T-233P/72	30,347	54.2	4 ga	70
TB2336-D-220	K-T-233B/41	220/1P	30,680	139.5	4/0	175	K-T-233W/41	35,793	162.7	300 mcm	225
TB2336-D-380-3PY	K-T-233B/52	380/3PY	30,680	69.7	2 ga	90	K-T-233W/52	35,793	69.7	2 ga	90
TB2336-D-400-3PY	K-T-233B/82	400/3PY	30,680	66.7	2 ga	90	K-T-233W/82	35,793	66.7	2 ga	90
TB2336-D-415-3PY	K-T-233B/72	415/3PY	30,680	63.9	3 ga	80	K-T-233W/72	35,793	63.9	3 ga	80



Control: Full digital touchscreen Genesis control with easy-to-use interface, WiFi enabled app, and simple programs for firing ceramics or glass.

For Model Number of Powered Bottom Model: Add a "PB" after the "D" (Example = T2327-D-PB-240-1).

UL Listing: c-ETL-us listed.

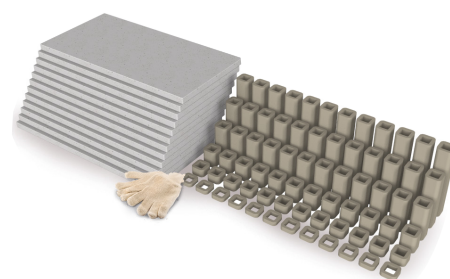

Control Panels: Floor standing panel. NEMA 1 panel are recommended but not required for 480 volts.

TB MODELS: TB models have more power.

480 Volt Models with Quad Element Option: See website kiln pages for electrical specifications.

Crating: Comes fully crated. Easily disassembles for installation.

FURNITURE KIT FOR T2336

Part Number: H-T-K436/00

Includes: Twelve 22" x 11" x 3/4" rectangular shelves (3/4" thick), twelve each 1/2", 1", 2", 4", 6", and 8" square posts, and one pair heat resistant gloves.

TRUST YOUR KILN
hotkilns.com

Manufactured in Swedesboro, NJ
800-750-8350 • sales@hotkilns.com

Bulletin No: BL-T2336 REV: A

Page 2

