


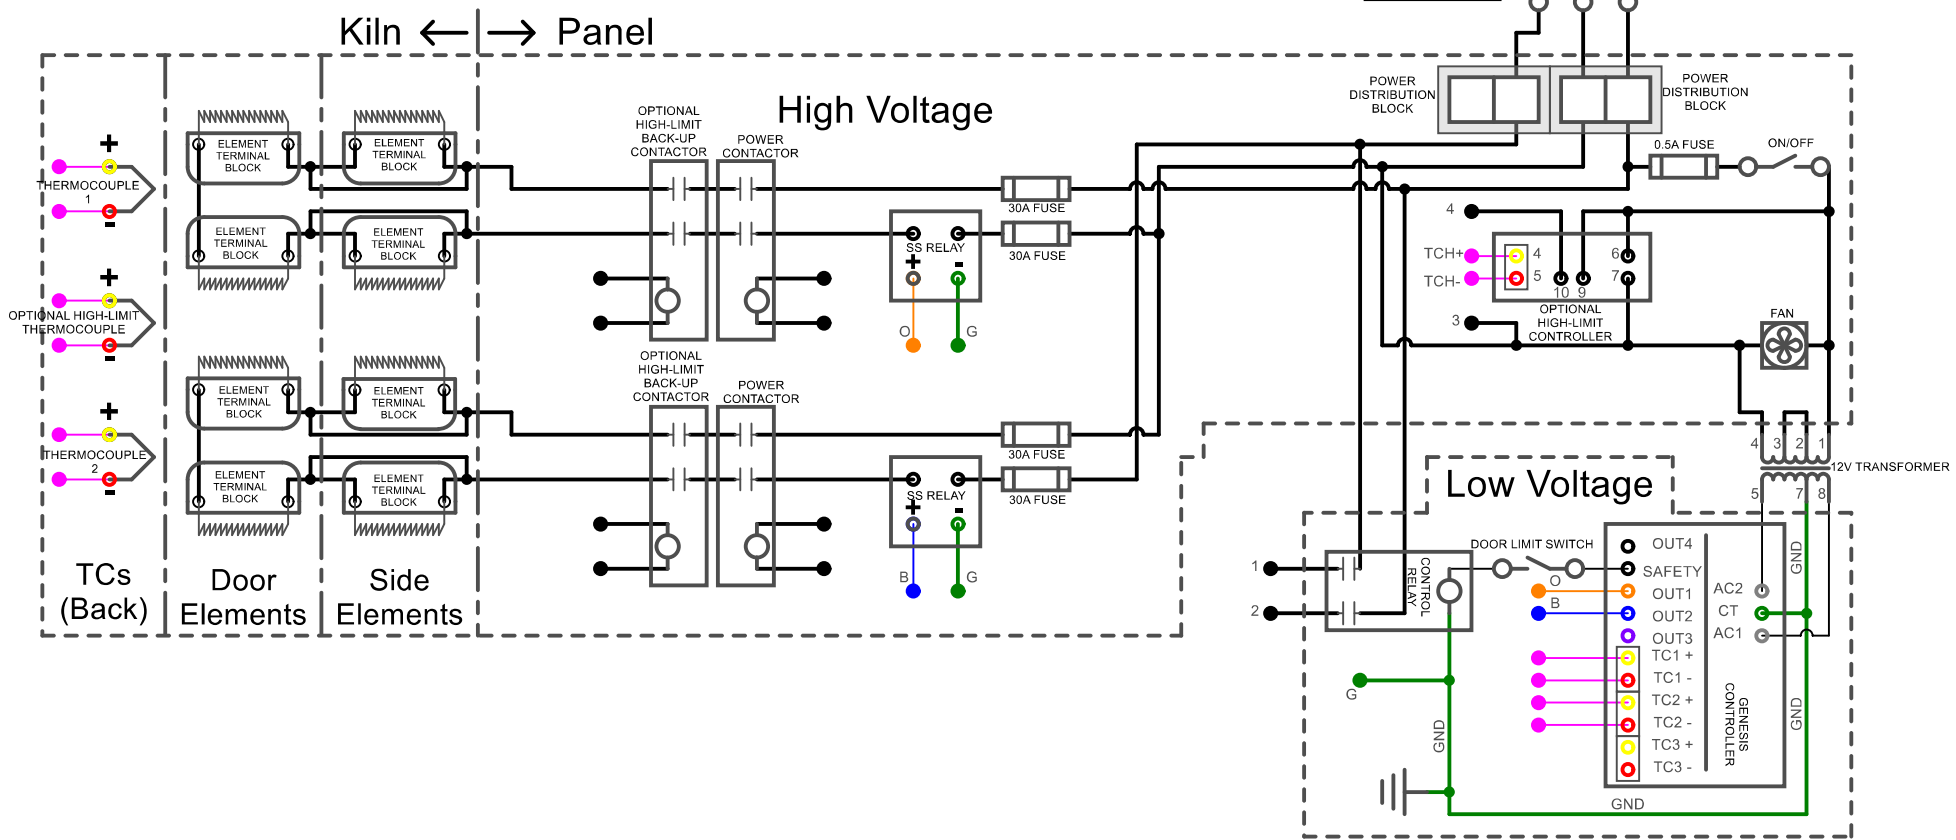

Wiring Information	
Power	6AWG / 150°C / 600V
Control	16AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: EL2424-208-3P				
Voltage		208 / 3 / 50-60		
Watts		15,000		
Full Load Amps	L1	L2	L3	
	62.5	62.5	62.5	
Power Supply	Fuse		Wire	
	80A		4AWG	
Side Elements:				
Quantity: 4		Ohms:		
Door Elements:				
Quantity: 4		Ohms:		

Model: EL2424-240-3P				
Voltage	240 / 3 / 50-60			
Watts	15,000			
Full Load Amps	L1	L2	L3	
	54.1	54.1	54.1	
Power Supply	Fuse		Wire	
	70A		4AWG	
Side Elements:				
Quantity: 4		Ohms:		
Door Elements:				
Quantity: 4		Ohms:		

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

EL2424 3 Phase 208V, 240V			
Rev.	Date	Description	
			505 Sharptown Road Swedesboro NJ 08085 service@hotkilns.com (856)-294-0077
			Drawn by: JS
			C0047