


Panel

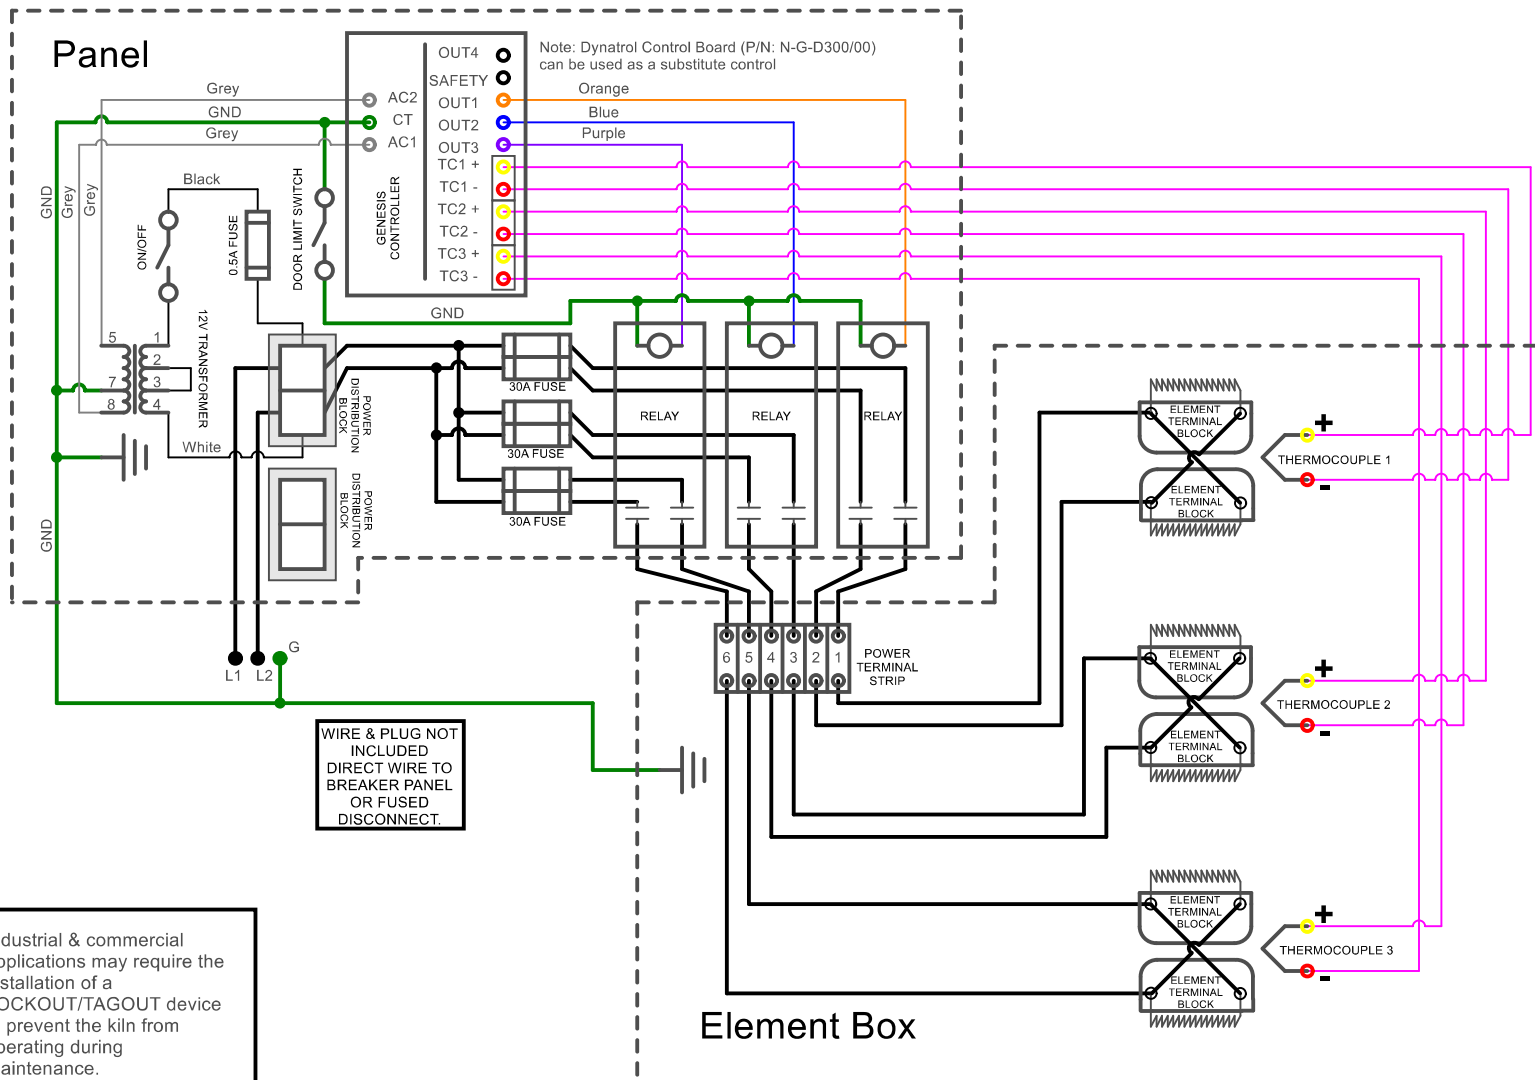

Element Box

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

Wiring Information

Power	10AWG / 150°C / 600V
Control	16AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: eFL1626-208

Voltage	208 / 1 / 50-60
Watts	11,650
Full Load Amps	L1 L2 L3
	56.0 56.0
Power Supply	Fuse Wire
	70A 4AWG
Elements	QTY OHMS
E-H-1626/21	6 21.5

Model: eFL1626-220

Voltage	220 / 1 / 50-60
Watts	12,500
Full Load Amps	L1 L2 L3
	56.8 56.8
Power Supply	Fuse Wire
	80A 4AWG
Elements	QTY OHMS
E-H-1626/41	6 22.4

eFL1626 1 Phase - Direct Wire 208V, 220V



505 Sharptown Road
Swedesboro NJ 08085
service@hotkilns.com
(856)-294-0077

Drawn by: JS

C0073

Rev. Date Description