


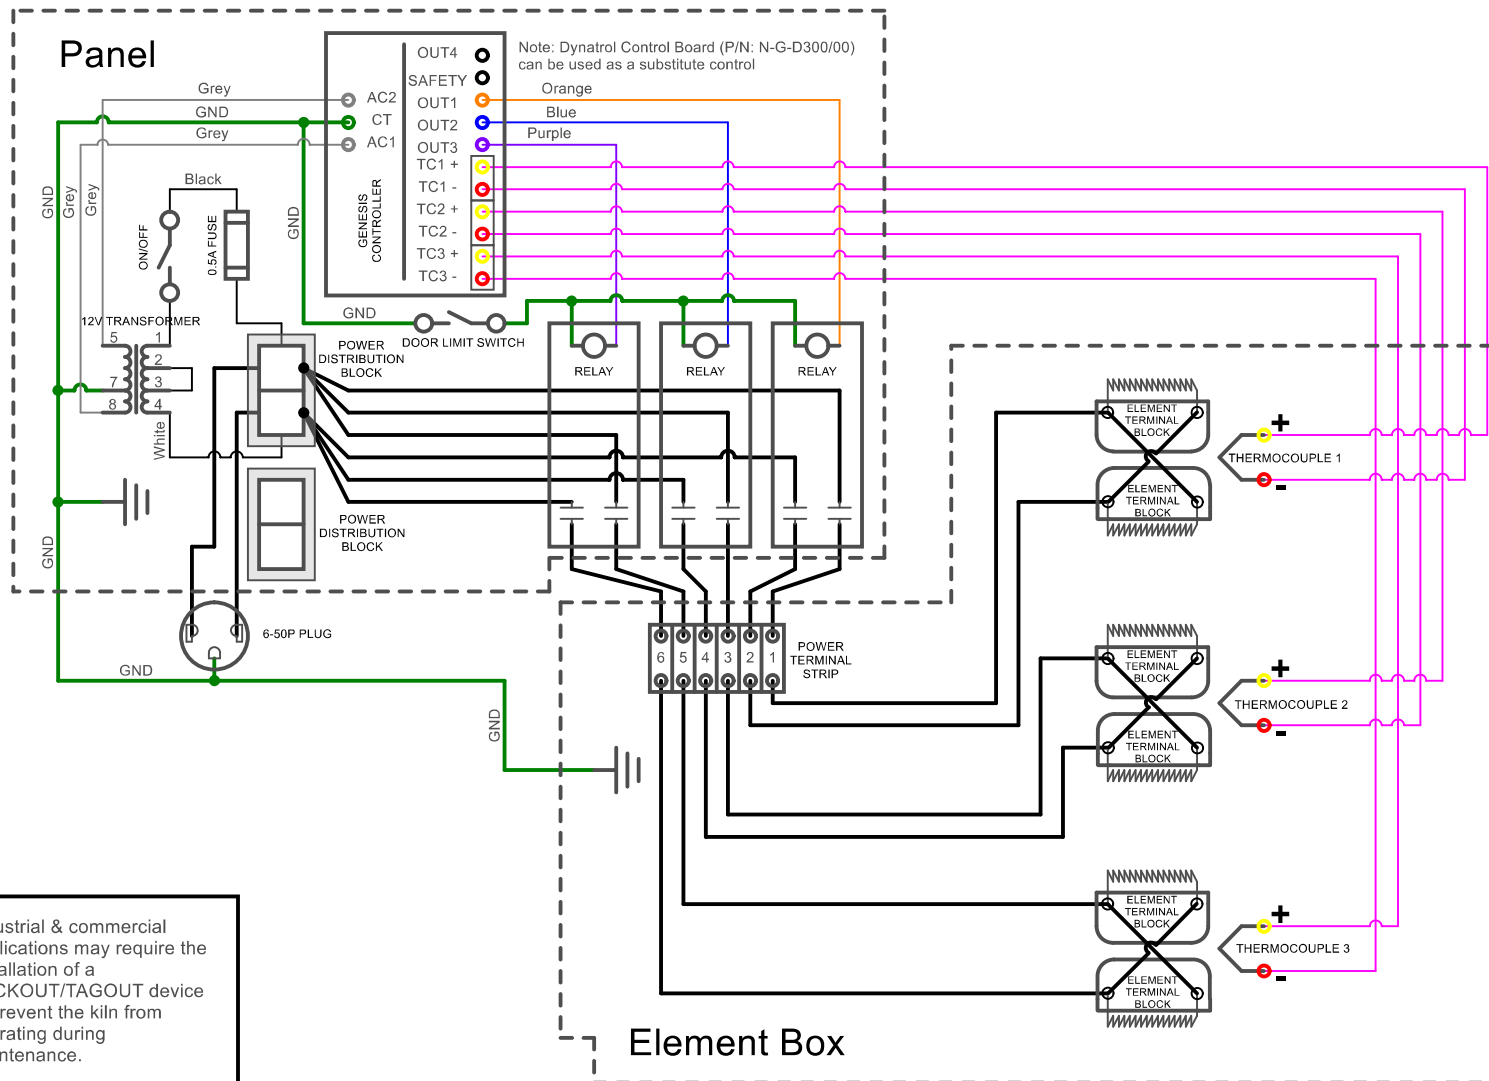

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

Wiring Information	
Power	10AWG / 150°C / 600V
Control	16AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: eFL1626-208-X			
Voltage	208 / 1 / 50-60		
Watts	9,984		
Full Load Amps	L1	L2	L3
	48.0	48.0	
Power Supply	Fuse	Wire	
	60A	6AWG	
Elements	QTY	OHMS	
	6	25.0	

Model: eFL1626-240			
Voltage	240 / 1 / 50-60		
Watts	11,520		
Full Load Amps	L1	L2	L3
	48.0	48.0	
Power Supply	Fuse	Wire	
	60A	6AWG	
Elements	QTY	OHMS	
	6	28.9	

eFL1626 1 Phase - With Plug 208V, 240V			 505 Sharptown Road Swedesboro NJ 08085 service@hotkilns.com (856)-294-0077 Drawn by: JS C0074
Rev.	Date	Description	