


Panel

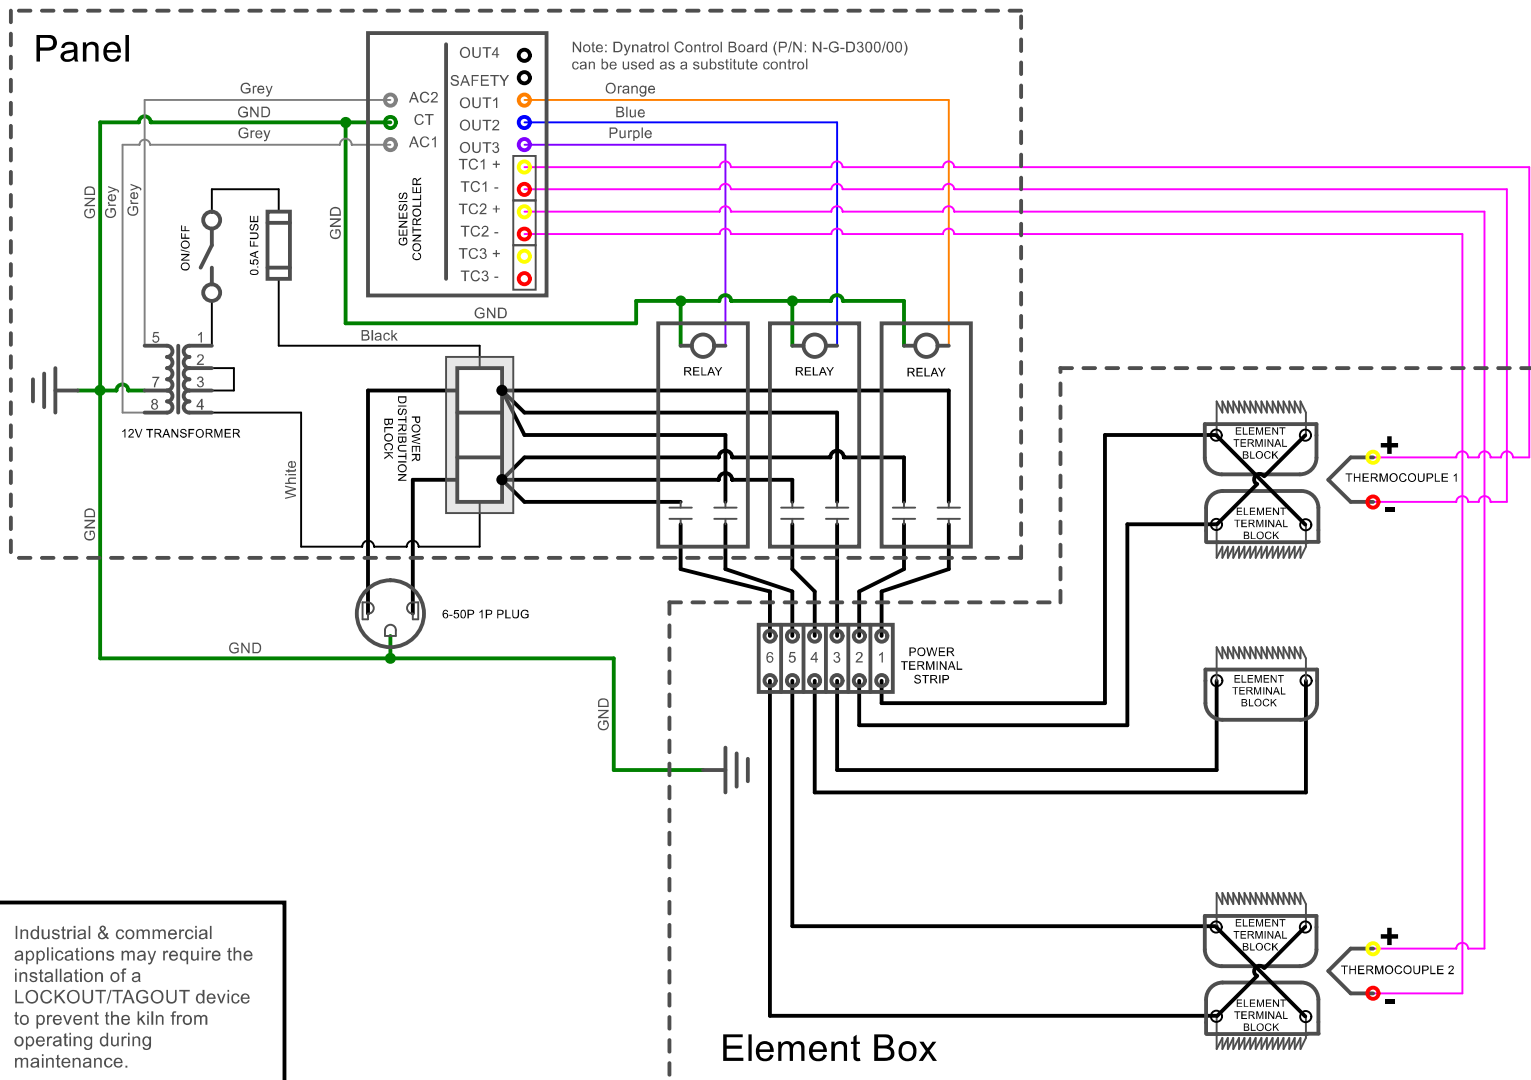

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

Wiring Information	
Power	10AWG / 150°C / 600V
Control	16-22AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: e23M-208	
Voltage	208 / 1 / 50-60
Watts	9,985
Full Load Amps	L1 48.0 L2 48.0 L3 48.0
Power Supply	Fuse 60A Wire 6AWG
Standard Elements: E-E-23ML/21	
Quad Elements: E-E-23MQ/21	
Quantity: 5	Ohms: 20.9

Model: e23M-240	
Voltage	240 / 1 / 50-60
Watts	11,520
Full Load Amps	L1 48.0 L2 48.0 L3 48.0
Power Supply	Fuse 60A Wire 6AWG
Standard Elements: E-E-23ML/31	
Quad Elements: E-E-23MQ/31	
Quantity: 5	Ohms: 24.1

E23M Easy-Fire 1 Phase 208V, 240V



505 Sharptown Road
Swedesboro NJ 08085
service@hotkilns.com
(856)-294-0077

Drawn by: JS

C0016

Rev. Date Description