


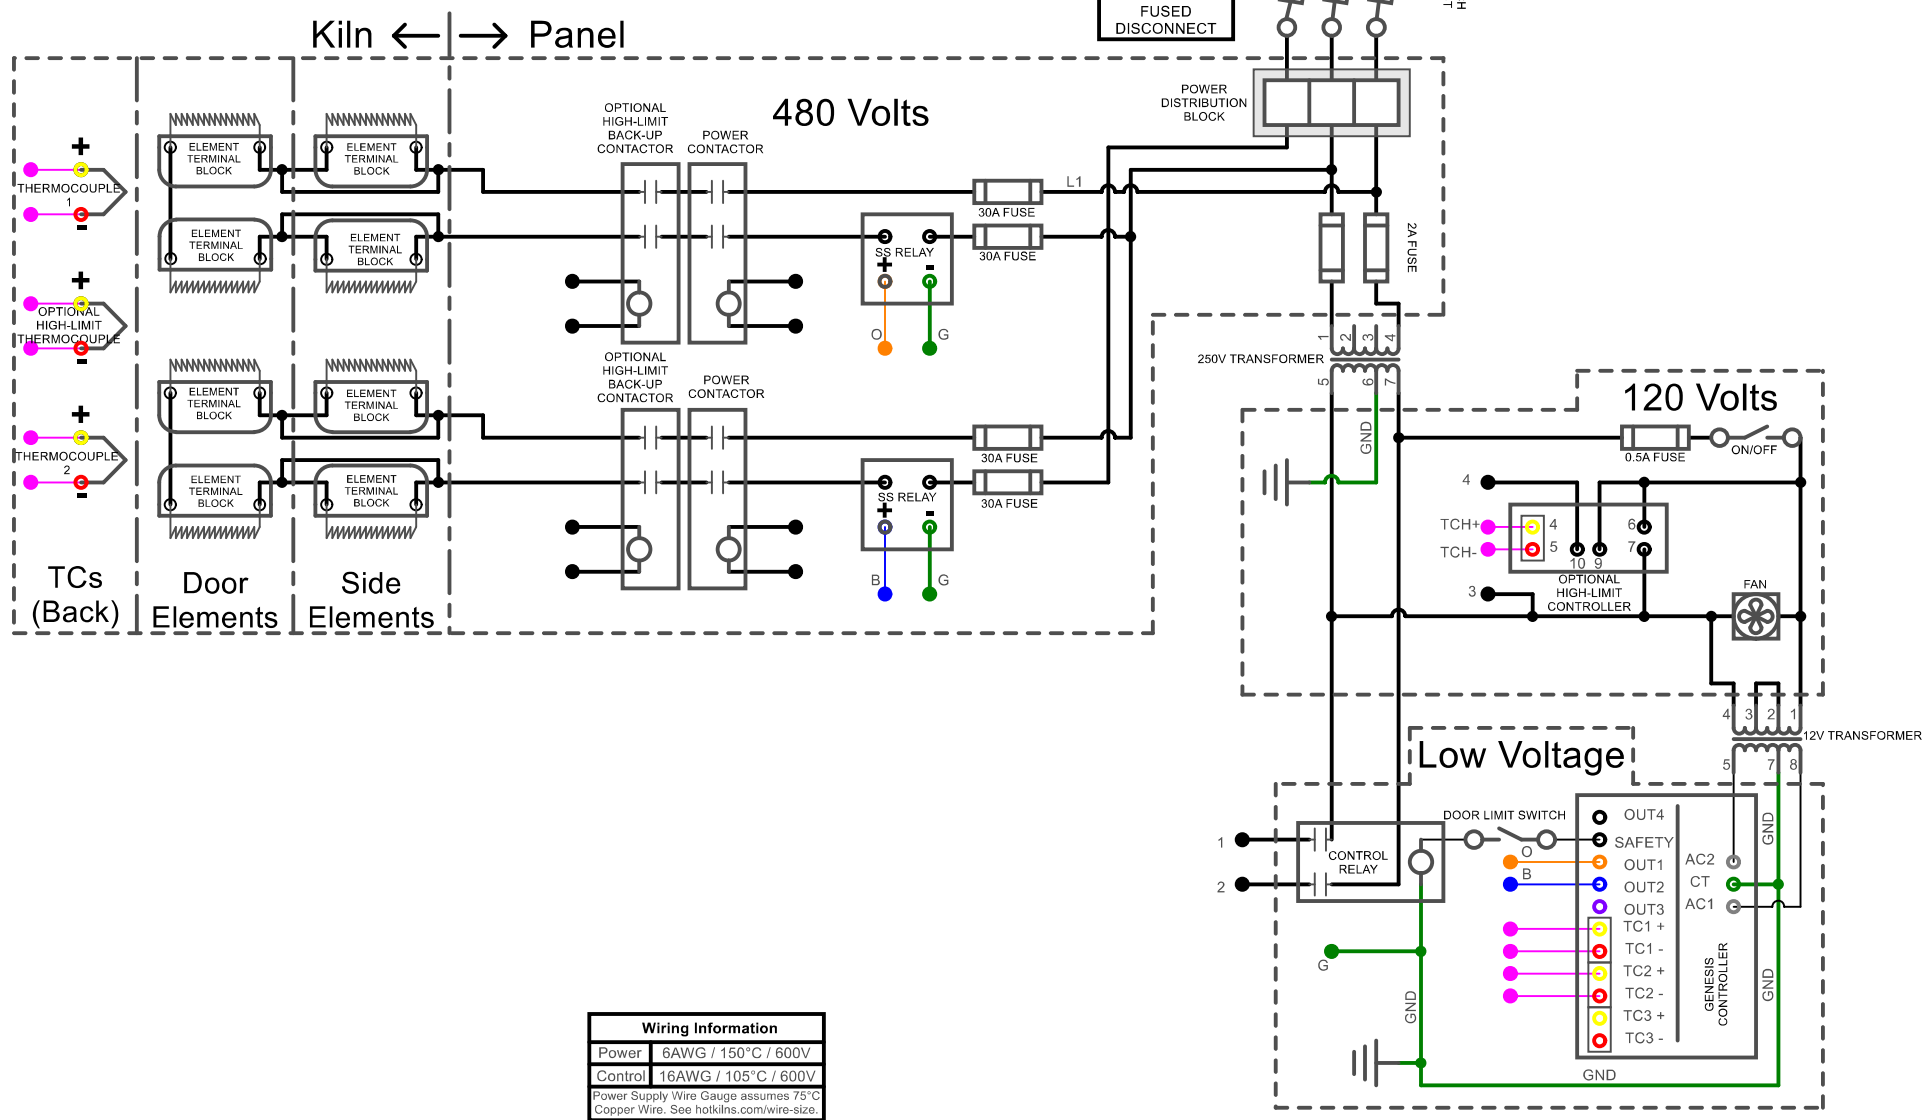

| Wiring Information                                                            |                      |
|-------------------------------------------------------------------------------|----------------------|
| Power                                                                         | 6AWG / 150°C / 600V  |
| Control                                                                       | 16AWG / 105°C / 600V |
| Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size. |                      |

| Model: EL2424-480-3P |                         |
|----------------------|-------------------------|
| Voltage              | 480 / 3 / 50-60         |
| Watts                | 15,000                  |
| Full Load Amps       | L1 27.1 L2 27.1 L3 27.1 |
| Power Supply         | Fuse 40A Wire 10AWG     |
| Side Elements:       | E-Z-2424/3S             |
| Quantity: 4          | Ohms: 11.1              |
| Door Elements:       | E-Z-2424/3D             |
| Quantity: 4          | Ohms: 3.7               |

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

| EL2424 3 Phase 480V |      |             | <br>505 Sharptown Road<br>Swedesboro NJ 08085<br>service@hotkilns.com<br>(856)-294-0077<br>Drawn by: JS |
|---------------------|------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rev.                | Date | Description |                                                                                                                                                                                              |
|                     |      |             | C0046                                                                                                                                                                                        |