


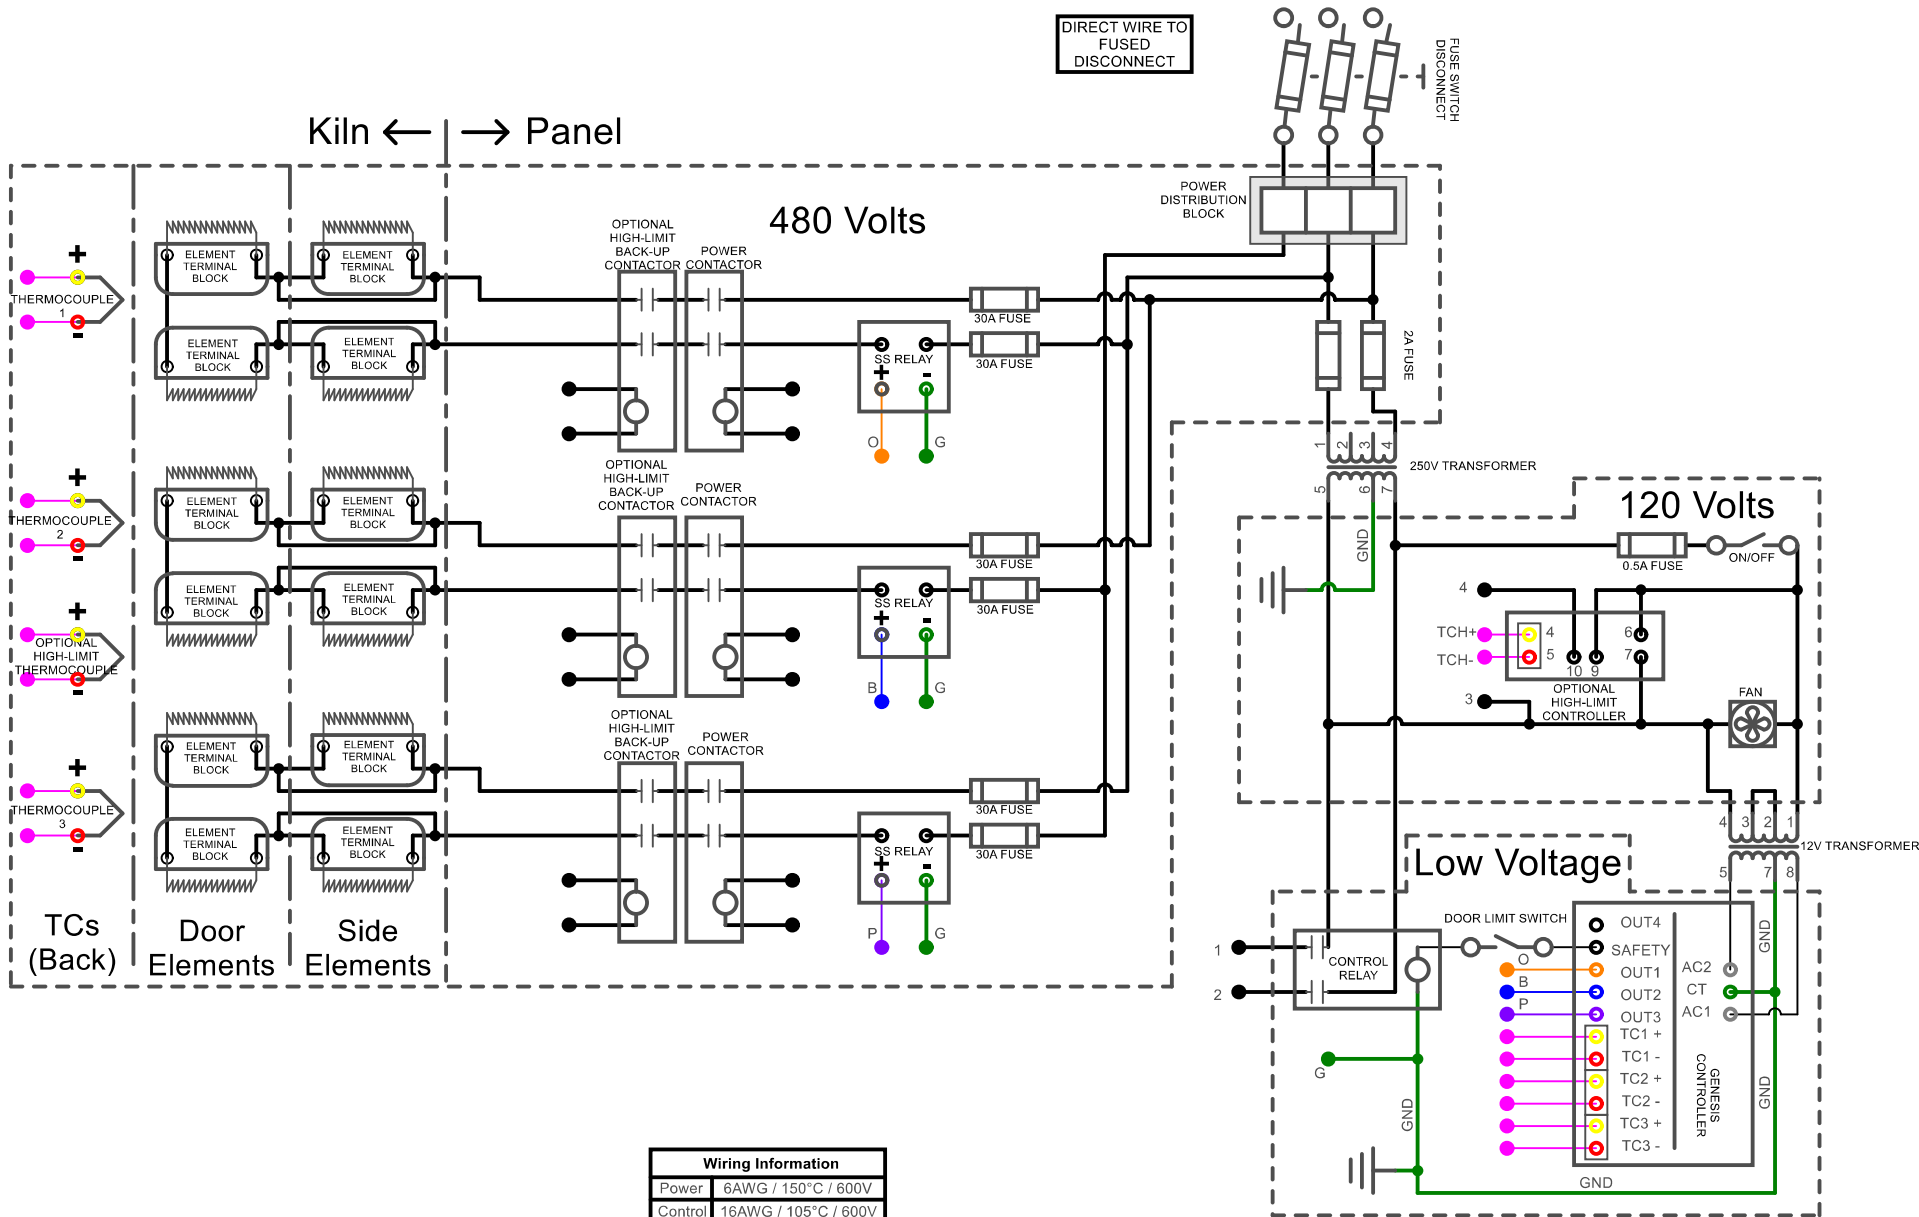

Wiring Information	
Power	6AWG / 150°C / 600V
Control	16AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: EL2427-480-3P	
Voltage	480 / 3 / 50-60
Watts	16,500
Full Load Amps	L1 19.8 L2 19.8 L3 19.8
Power Supply	Fuse 25A Wire 12AWG
Side Elements: E-Z-2427/3S	
Quantity: 6	Ohms: 15.1
Door Elements: E-Z-2427/3D	
Quantity: 6	Ohms: 5

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

EL2427 3 Phase 480V 480V			
Rev.	Date	Description	
A			505 Sharptown Road Swedesboro NJ 08085 service@hotkilns.com (856)-294-0077
			Drawn by: JS
			C0049