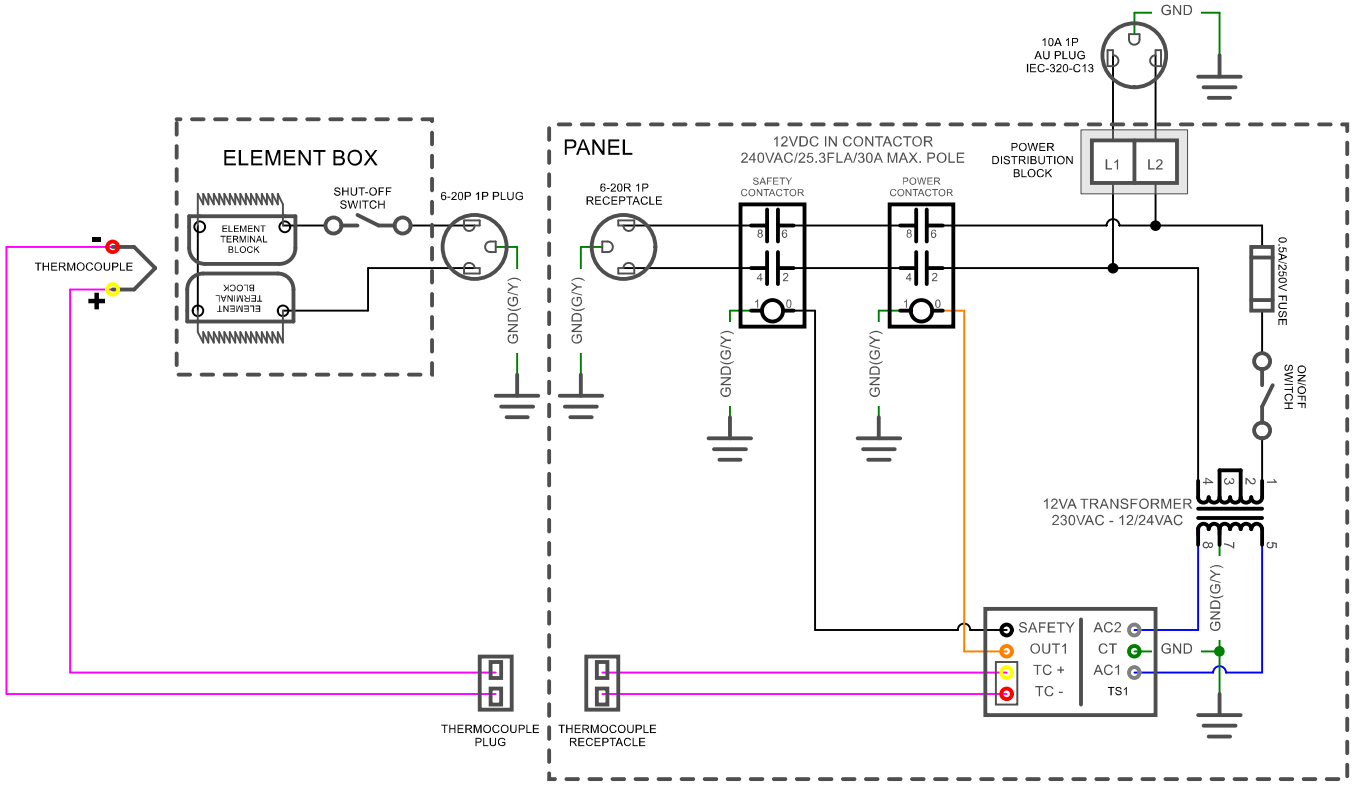


| Wiring Information | |
|---|---|
| Power | 14AWG / 150°C / 600V |
| Control | 16-22AWG / 105°C / 600V |
| Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size. | |

| Model: PF8-1800-AU | | | |
|---|---|---|---|
| Voltage | 230 / 1 / 50-60 | | |
| Watts | 1,800 | | |
| Full Load Amps | L1 | L2 | L3 |
| | 7.8 | 7.8 | |
| Power Supply | Fuse | Wire | |
| | 10A | 1.5 mm² | |
| Elements E-D-PF8X/40 | QTY | OHMS | |
| | 2 | 14.14 | |

# PF8-1800-AU 1 Phase 230V (C0044)

L&L KILNS

505 Sharptown Road
Swedesboro NJ 08085
service@hotkilns.com
(856)-294-0077

| Rev. | Date | Description | Approved by | |
|---|---|---|---|---|
| A | 05/01/2026 | | AF | |

Drawn by: AF

Dwg. No. C0044