

MODEL	WIRING DIAGRAM
J23-PB	K035-111

**PLUG KILN SECTION
CAPS INTO RESPECTIVE
RECEPTACLES**

Control Wire:
14 AWG, SEWF, 150°C
Power Wire:
14 AWF, SEWF, 150°C

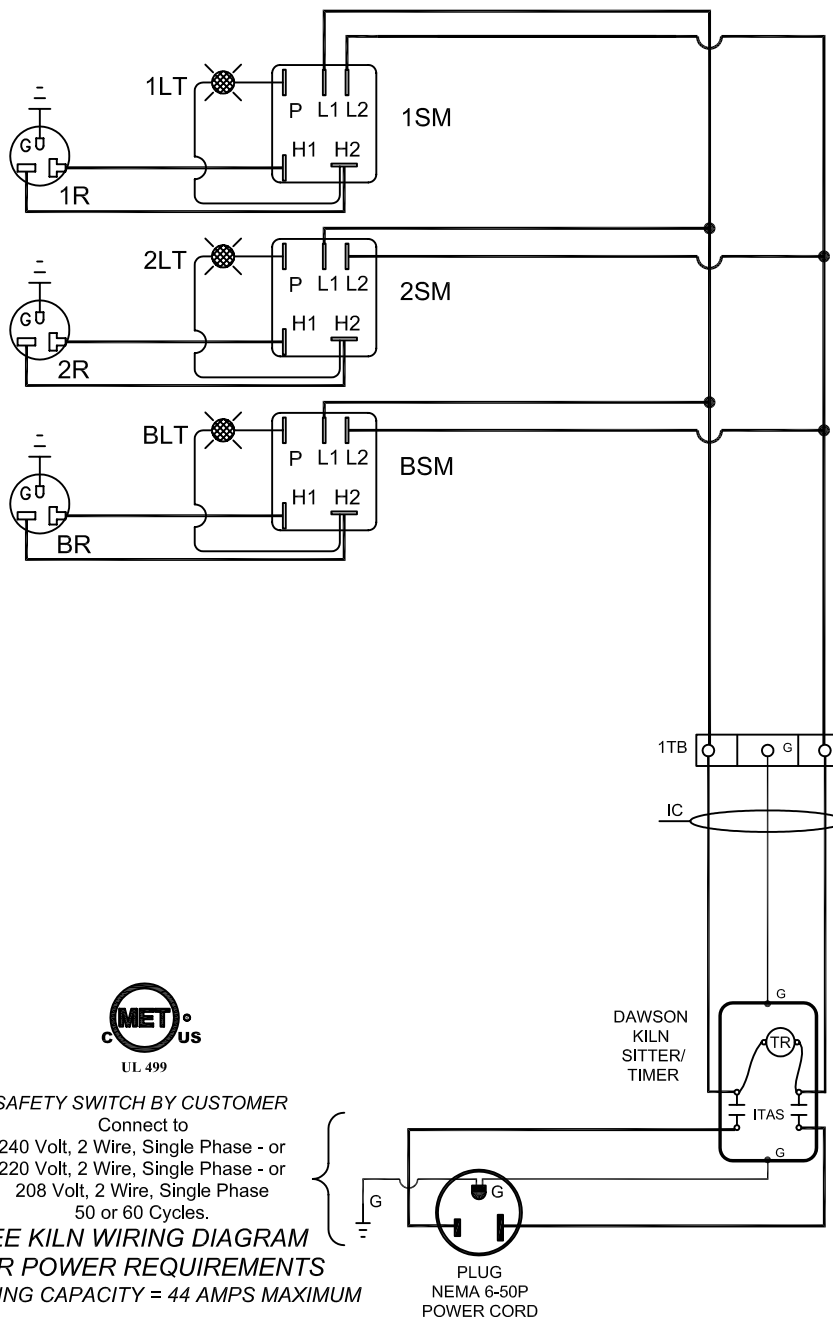
Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the Kiln from operating during maintenance.

This Kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the KW load load specification listed on the Kiln Nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.



Connect to
240 Volt, 2 Wire, Single Phase - or
220 Volt, 2 Wire, Single Phase - or
208 Volt, 2 Wire, Single Phase
50 or 60 Cycles.

SWITCHING CAPACITY = 44 AMPS MAXIMUM

[illegible][illegible]