


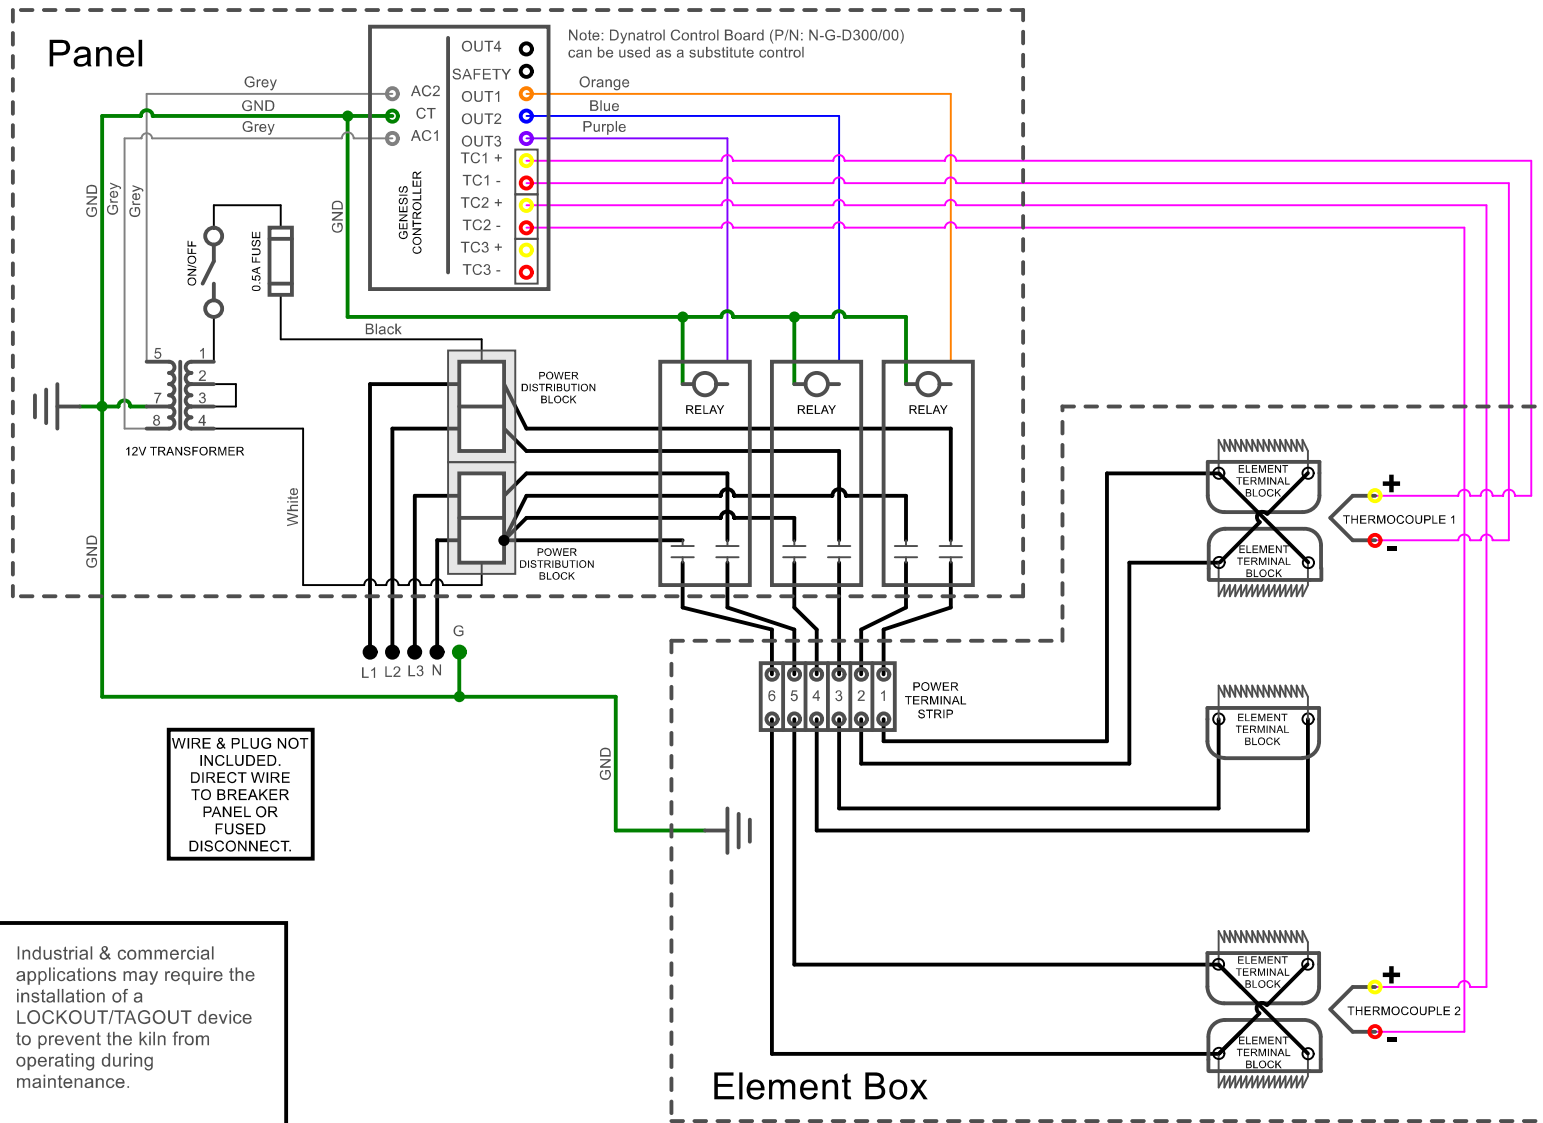

Wiring Information	
Power	10AWG / 150°C / 600V
Control	16AWG / 105°C / 600V
Power Supply Wire Gauge assumes 75°C Copper Wire. See hotkilns.com/wire-size.	

Model: e18M-380-3PY		
Voltage	380 / 3-Y / 50-60	
Watts	8,000	
Full Load Amps	L1	L2 L3
	14.5	14.5 7.3
Power Supply	Fuse	Wire
	20A	14AWG
Elements	QTY	OHMS
E-E-18ML/41	5	29.11

Model: e18M-400-3PY		
Voltage	400 / 3-Y / 50-60	
Watts	9,085	
Full Load Amps	L1	L2 L3
	15.8	15.8 7.9
Power Supply	Fuse	Wire
	20A	14AWG
Elements	QTY	OHMS
E-E-18ML/41	5	29.11

Model: e18M-415-3PY		
Voltage	415 / 3-Y / 50-60	
Watts	8,000	
Full Load Amps	L1	L2 L3
	13.3	13.3 6.7
Power Supply	Fuse	Wire
	20A	14AWG
Elements	QTY	OHMS
E-E-18SL/31	5	34.65

E18M Easy-Fire 3 Phase Wye 380V, 400V, 415V



505 Sharptown Road
Swedesboro NJ 08085
service@hotkilns.com
(856)-294-0077

Drawn by: JS

Rev.	Date	Description	C0005
------	------	-------------	-------