- 1. WALL/KILN SPACING: 12" [30.5cm] SPACING BETWEEN SIDES OF KILN AND WALLS OR OTHER OBJECTS. 18" [45.7cm] IS RECOMMENDED. LEAVE AT LEAST 18" [45.7cm] BETWEEN TWO KILNS.
- 2. AMBIENT VENTILATION: SEE CHART TO RIGHT FOR RATINGS. TO CALCULATE REQUIREMENTS, SEE hotkilns.com/calculate-kiln-room-ventilation.

NEW


DSL

5

- 3. KILN VENTILATION: L&L VENT-SURE KILN VENT RECOMMENDED FOR SAFETY AND LONGER ELEMENT LIFE. OPTIONAL CONTROL ALLOWS VENT TO BE TURNED ON AND OFF WITH CONTROL.
- OTHER INFO: REFER TO INSTALLATION INSTRUCTIONS AND CAUTIONS INSTRUCTIONS FOR OTHER REQUIREMENTS AND SAFETY INFORMATION. REFER TO WIRING DIAGRAM FOR ELECTRICAL HOOKUP INFORMATION.
- MAX LOAD WEIGHT: SEE hotkilns.com/load-weight.
- WEIGHT OF KILN: 270 LBS, 122 KG

BTUS/ KILOJOULES PER HOUR NEEDED TO BE VENTED WITH AMBIENT ROOM VENTILATION (THIS IS IN ADDITION TO KILN VENTING):


AT TEMP F	BTUS	AT TEMP C	KILOJOULES
1800F	8908	980C	9398
2000F	10414	1095C	10988
2232F	12297	1222C	12974
2350F	13310	1285C	14043

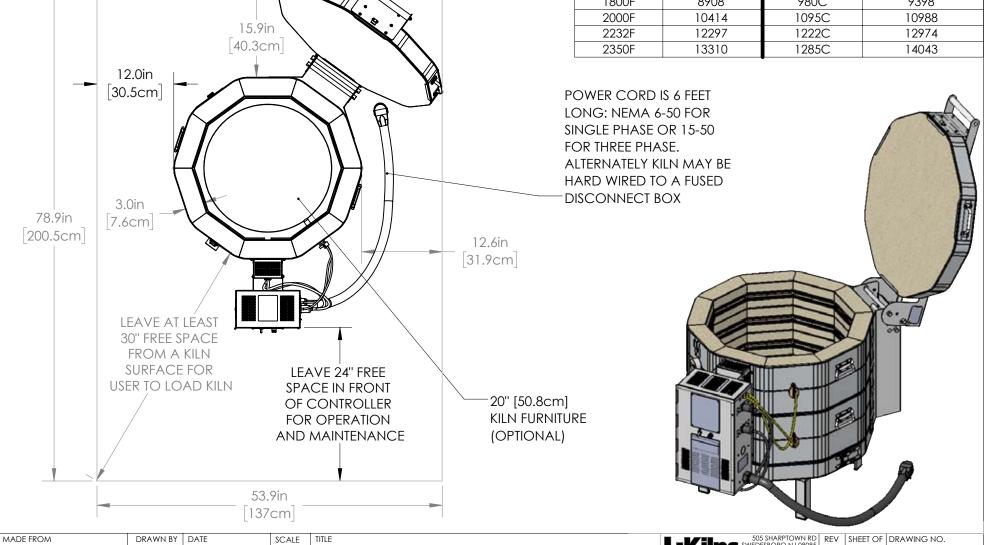


02/01/20 1:15 JD23V-3 (3" BRICK) GENERAL DIMENSIONS 505 SHARPTOWN RD SWEDESBORO NJ 08085

0

1/3 235-000-50-2

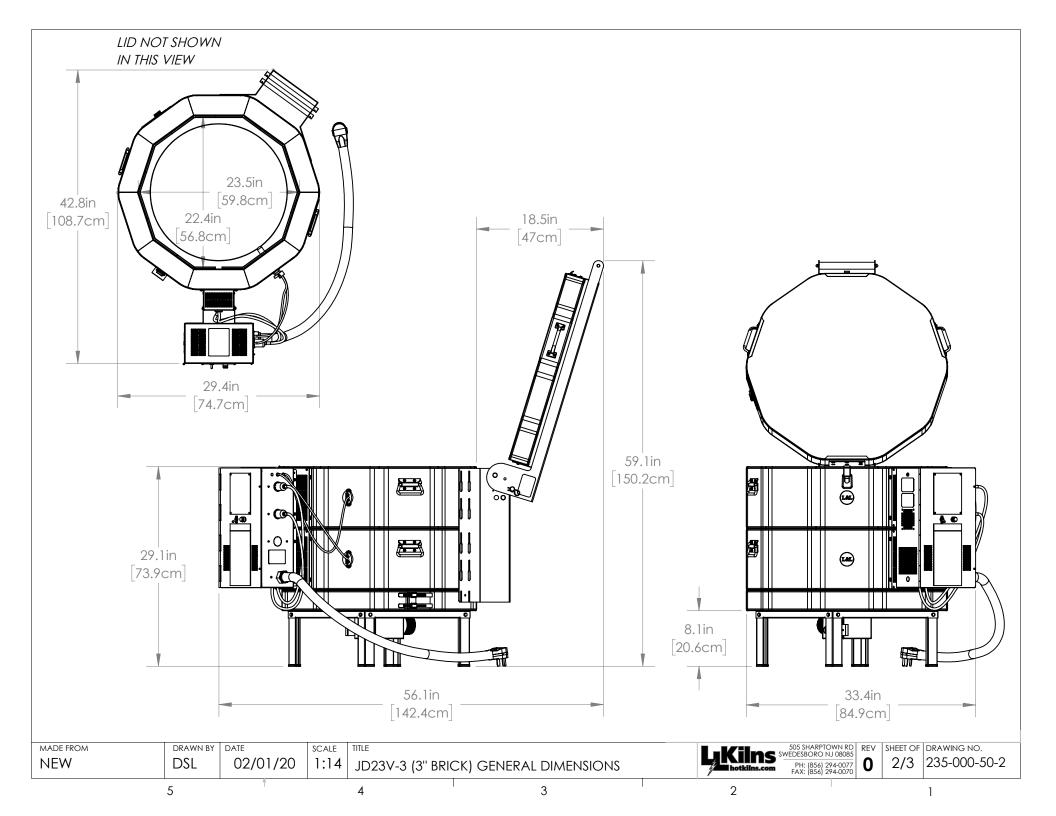

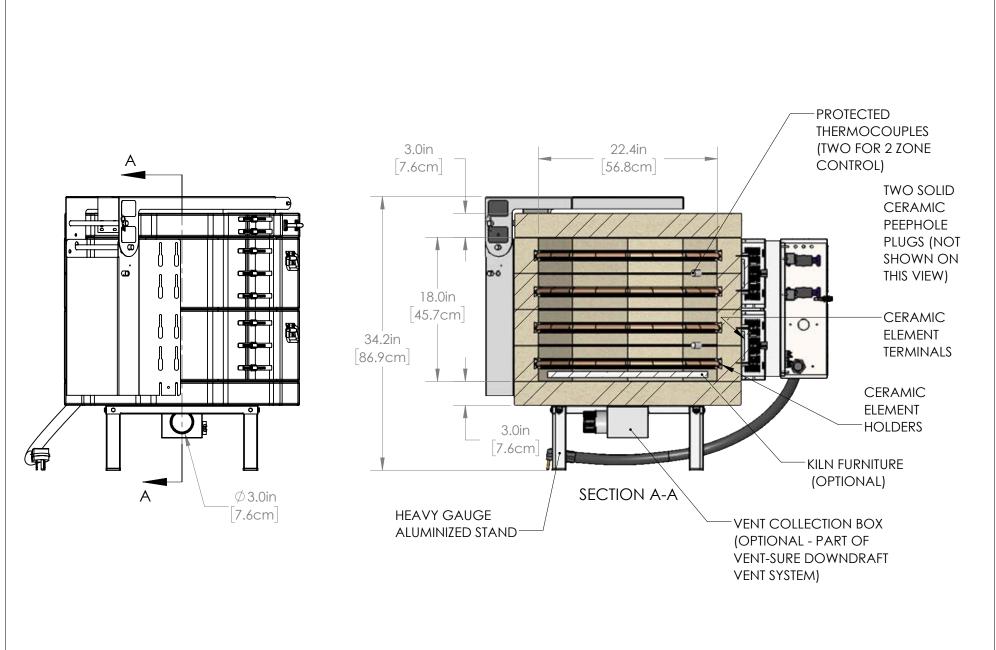

OPTIONAL FURNITURE KIT: (1) 20" [50.8cm] FULL ROUND SHELVES, (4) HALF ROUND SHELVES, SIX EACH 1/2", 1", 2", 4", 6" & 8" SQUARE POSTS

NEW DSL DRAWN BY DATE DSL SCALE TITLE JD23V-3 (3" BRICK) GENERAL DIMENSIONS	505 SHARFTOWN RD REV SHEET OF DRAWING NO. 235-000-50-2
--	--

5 4 2