


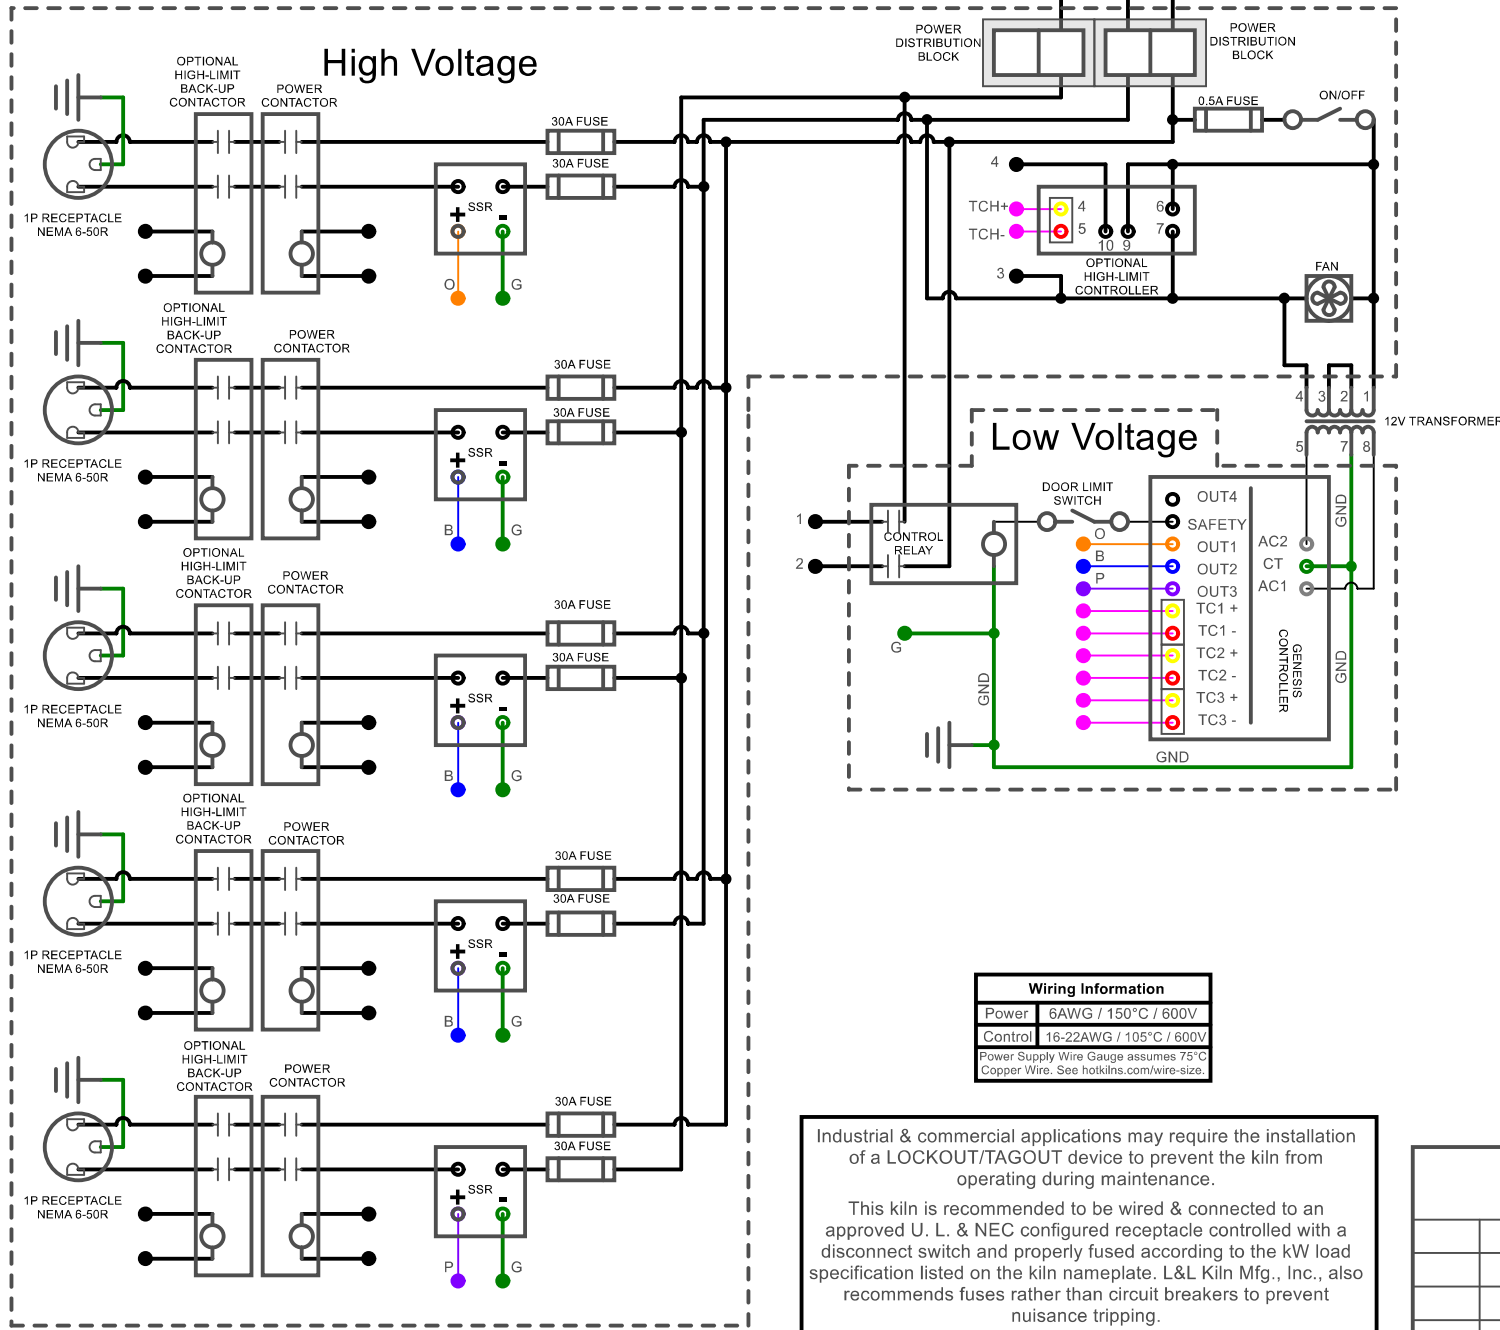

Industrial & commercial applications may require the installation of a LOCKOUT/TAGOUT device to prevent the kiln from operating during maintenance.

This kiln is recommended to be wired & connected to an approved U. L. & NEC configured receptacle controlled with a disconnect switch and properly fused according to the kW load specification listed on the kiln nameplate. L&L Kiln Mfg., Inc., also recommends fuses rather than circuit breakers to prevent nuisance tripping.

T2345 3 Phase			 505 Sharptown Road Swedesboro NJ 08085 service@hotkilns.com (856)-294-0077
Rev.	Date	Description	
A			
Drawn by: JS			P0032